



11-27-00

A

11/25/00
10661 U.S. PTO

Please type a plus sign (+) inside this box  

Approved for use through 10/31/2002 OMB 0651-0032
U.S. Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL (Only for new nonprovisional applications under 37 CFR 1.53(b))	Attorney Docket No.	NPA061US
	First Inventor	KIA SILVERBROOK
	Title	METHOD AND SYSTEM FOR CAPTURING A NOTE TAKING SESSION
	Express Mail Label No.	EJ776407076US

APPLICATION ELEMENTS See MPEP chapter 600 concerning utility patent application contents.	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	7. <input type="checkbox"/> CD-ROM or CD-R in duplicate, large table or Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Applicant claims small entity status See 37 CFR 1.27.	8. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
3. <input checked="" type="checkbox"/> Specification [Total Pages 35] (preferred arrangement set forth below)	a. <input type="checkbox"/> Computer Readable Form (CRF)
- Descriptive title of the invention	b. Specification Sequence Listing on:
- Cross Reference to Related Applications	i. <input type="checkbox"/> CD-ROM or CD-R (2 copies); or
- Statement Regarding Fed sponsored R & D	ii. <input type="checkbox"/> paper
- Reference to sequence listing, a table, or a computer program listing appendix	c. <input type="checkbox"/> Statements verifying identity of above copies
- Background of the Invention	
- Brief Summary of the Invention	
- Brief Description of the Drawings (if filed)	
- Detailed Description	
- Claim(s)	
- Abstract of the Disclosure	
4. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 23]	
5. Oath or Declaration [Total Pages 3]	
a. <input checked="" type="checkbox"/> Newly executed (original or copy)	
b. <input type="checkbox"/> Copy from a prior application (37 CFR 1.63 (d)) (for continuation/divisional with Box 17 completed)	
i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b)	
6. <input type="checkbox"/> Application Data Sheet. See 37 CFR 1.76	

ACCOMPANYING APPLICATION PARTS	
9. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s))	
10. <input type="checkbox"/> 37 CFR 3.73(b) Statement (when there is an assignee)	<input type="checkbox"/> Power of Attorney
11. <input type="checkbox"/> English Translation Document (if applicable)	
12. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449	<input type="checkbox"/> Copies of IDS Citations
13. <input type="checkbox"/> Preliminary Amendment	
14. <input type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized)	
15. <input checked="" type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed)	
16. <input type="checkbox"/> Other:	

17. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment, or in an Application Data Sheet under 37 CFR 1.76:

<input type="checkbox"/> Continuation	<input type="checkbox"/> Divisional	<input type="checkbox"/> Continuation-in-part (CIP)	of prior application No.
Prior application information			Examiner
			Group / Art Unit

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

18. CORRESPONDENCE ADDRESS	
<input checked="" type="checkbox"/> Customer Number or Bar Code Label	24011 (Insert Customer No. or Attach bar code label here)
or <input type="checkbox"/> Correspondence address below	

Name	KIA SILVERBROOK				
Address	393 Darling Street,				
City	Balmain	State	NSW	Zip Code	2041
Country	Australia	Telephone	+61-2-9818-6633	Fax	+61-2-9819-6711

Name (Print/Type)	KIA SILVERBROOK	Registration No. (Attorney/Agent)	
Signature		Date	November 22, 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**FEE TRANSMITTAL
for FY 2001**

Patent fees are subject to annual revision.

Complete if Known

Application Number	
Filing Date	
First Named Inventor	KIA SILVERBROOK
Examiner Name	
Group Art Unit	
Attorney Docket No.	NPA061US

TOTAL AMOUNT OF PAYMENT (\$)**543****METHOD OF PAYMENT**

1. ☐ The Commissioner is hereby authorized to charge indicated fees and credit any overpayments to:
- Deposit Account Number
- Deposit Account Name
- ☐ Charge Any Additional Fee Required Under 37 CFR 1.16 and 1.17
- ☐ Applicant claims small entity status See 37 CFR 1.27
2. ☒ Payment Enclosed:
- ☒ Check ☐ Credit card ☐ Money Order ☐ Other

FEE CALCULATION**1. BASIC FILING FEE**

Large Entity	Small Entity	Fee Code (\$)	Fee Code (\$)	Fee Description	Fee Paid
101	710	201	355	Utility filing fee	355
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	

SUBTOTAL (1) (\$)**355****2. EXTRA CLAIM FEES**

Total Claims **32** - 20** = **12** X **9** = **108**

Independent Claims **2** - 3** = **0** X **40** = **0**

Multiple Dependent X =

Large Entity	Small Entity	Fee Code (\$)	Fee Code (\$)	Fee Description	Fee Paid
103	18	203	9	Claims in excess of 20	
102	80	202	40	Independent claims in excess of 3	
104	270	204	135	Multiple dependent claim, if not paid	
109	80	209	40	** Reissue independent claims over original patent	
110	18	210	9	** Reissue claims in excess of 20 and over original patent	

SUBTOTAL (2) (\$)**108**

**or number previously paid, if greater. For Reissues, see above

FEE CALCULATION (continued)**3. ADDITIONAL FEES**


Large Entity	Small Entity	Fee Code (\$)	Fee Code (\$)	Fee Description	Fee Paid
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
147	2,520	147	2,520	For filing a request for ex parte reexamination	
112	920*	112	920*	Requesting publication of SIR prior to Examiner action	
113	1,840*	113	1,840*	Requesting publication of SIR after Examiner action	
115	110	215	55	Extension for reply within first month	
116	390	216	195	Extension for reply within second month	
117	890	217	445	Extension for reply within third month	
118	1,390	218	695	Extension for reply within fourth month	
128	1,890	228	945	Extension for reply within fifth month	
119	310	219	155	Notice of Appeal	
120	310	220	155	Filing a brief in support of an appeal	
121	270	221	135	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,240	241	620	Petition to revive - unintentional	
142	1,240	242	620	Utility issue fee (or reissue)	
143	440	243	220	Design issue fee	
144	600	244	300	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions related to provisional applications	
126	240	126	240	Submission of Information Disclosure Stmt	
581	40	581	40	Recording each patent assignment per property (times number of properties)	80
146	710	246	355	Filing a submission after final rejection (37 CFR § 1.129(a))	
149	710	249	355	For each additional invention to be examined (37 CFR § 1.129(b))	
179	710	279	355	Request for Continued Examination (RCE)	
169	900	169	900	Request for expedited examination of a design application	

Other fee (specify) _____

* Reduced by Basic Filing Fee Paid

SUBTOTAL (3) (\$)**80****SUBMITTED BY**

Name (Print/Type) **Kia Silverbrook**

Signature 

Registration No.
(Attorney/Agent)

Complete (if applicable)

Telephone **+61-2-9818-6633**

Date **Nov. 22, 2000**

WARNING: Information on this form may become public. Credit card information should not be included on this form. Provide credit card information and authorization on PTO-2038.

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

METHOD AND SYSTEM FOR CAPTURING A NOTE-TAKING SESSION

FIELD OF INVENTION

The present invention relates generally to computing systems and, more particularly, to a method and system for capturing, in a computer system, data relating to a note-taking session. The system and method of the invention are suitable for use in, for example, an educational environment or a meeting environment.

CO-PENDING APPLICATIONS

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention simultaneously with the present invention:

NPA060US, NPA061US, NPA081US, NPA082US, NPP010US, NPP013US, NPP015US, NPP020US, NPP021US, NPP022US, NPP023US, NPS014US, NPS015US, NPS017US, NPS018US, NPS022US, NPS027US, NPS028US, NPT008US, BIN01US, BIN02US, BIN03US, BIN04US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 20 October 2000:

NPA011US, NPA031US, NPA040US, NPA046US, NPA053US, NPA059US, NPA064US, NPB006US, NPS004US, NPS008US, NPS013US, NPS024US, NPPC1, UP01US, UP02US, UP03US, UP04US, UP05US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 15 September 2000:

NPA024US, NPA025US, NPA047US, NPA049US

The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

- 5 Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 30 June 2000:

10 NPA014US, NPA015US, NPA022US, NPA026US, NPA038US, NPA041US,
NPA050US, NPA051US, NPA052US, NPA063US, NPA065US, NPA067US,
NPA068US, NPA069US, NPA071US, NPA072US, NPB003US, NPB004US,
NPB005US, NPP019US, PEC04US, PEC05US, PEC06US, PEC07US

- 15 The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

Various methods, systems and apparatus relating to the present invention are disclosed in the following co-pending applications filed by the applicant or assignee of the present invention on 23 May 2000:

20 NPA001US, NPA002US, NPA004US, NPA005US, NPA006US, NPA007US,
NPA008US, NPA009US, NPA010US, NPA012US, NPA016US, NPA017US,
NPA018US, NPA019US, NPA020US, NPA021US, NPA030US, NPA035US,
NPA048US, NPA075US, NPB001US, NPB002US, NPK002US, NPK003US,
NPK004US, NPK005US, NPM001US, NPM002US, NPM003US, NPM004US,
25 NPN001US, NPP001US, NPP003US, NPP005US, NPP006US, NPP007US,
NPP008US, NPP016US, NPP017US, NPP018US, NPS001US, NPS003US,
NPS020US, NPT001US, NPT002US, NPT003US, NPT004US, NPX001US,
NPX003US, NPX008US, NPX011US, NPX014US, NPX016US, IJ52US,
IJM52US, MJ10US, MJ11US, MJ12US, MJ13US, MJ14US,
MJ15US, MJ34US, MJ47US, MJ58US, MJ62US, MJ63US,
30 PAK04US, PAK05US, PAK06US, PAK07US, PAK08US, PEC01US,
PEC02US, PEC03US

- 35 The disclosures of these co-pending applications are incorporated herein by cross-reference. Each application is temporarily identified by its docket number. This will be replaced by the corresponding USSN when available.

BACKGROUND

Remote whiteboard computer systems are already established. Such interactive systems allow participants in mutually disparate geographical locations to participate in a collaborative activity in real time. Generally each participant has access to a computer
5 means that is networked with the computers of the other participants. A display device accessible to each participant acts as a 'virtual whiteboard', allowing the participants to submit and receive drawings and alternative graphical or other information. Each participant may have a copy of a common drawing on his or her virtual whiteboard, and can edit or otherwise amend that drawing, such 'markups' being immediately transmitted
10 to the other participants to maintain in a consistent state the common drawing.

Additionally, conventional whiteboards are also commonly used in educational environments, to facilitate the transfer of information from teacher to student, and in group discussions such as business meetings, where ideas need to be communicated between participants. The whiteboard provides a convenient surface on which concepts
15 can be graphically expressed, by way of notes, drawings, charts, etc. Such notations can be made in selected colors and can be readily erased from the smooth, wipeable surface.

Electronic whiteboards which have been developed allow representations of notations made upon a specially designed whiteboard to be transmitted to a computer for storage, display, transmission, printing, etc. During a meeting session, graphical user
20 input entered on the electronic whiteboard is digitized and stored in a file, and dedicated whiteboard application software enables retrieval and manipulation. At any time, stored session files may be retrieved to view or print the information, or to copy it to other applications if required. To this end, the whiteboard surface generally includes a writing/drawing region, and a control region providing means for inputting control
25 commands via the whiteboard.

SUMMARY OF INVENTION

It is an objective of the present invention to provide a new method and system for capturing, in a computer system, data relating to a note-taking session.

The present invention provides, in a first aspect, a method of capturing, in a
30 computer system, data relating to a note-taking session, the session consisting of

handwritten annotations made by a user by way of a writing implement on a plurality of pages, the method including the steps of:

receiving, in the computer system and via the writing implement, an indication of the start of the note-taking session;

- 5 receiving, in the computer system and via the writing implement, data indicative of said handwritten annotations made by said user on said plurality of pages;

receiving, in the computer system and via the writing implement, an indication of the end of the note-taking session; and

retaining a retrievable record of the received data for the note-taking session.

- 10 According to the invention in a second aspect, there is provided a system for capturing data relating to a note-taking session, the session consisting of handwritten annotations made by a user by way of a writing implement on a plurality of pages, the system including:

- a computer system for receiving indicating data via the writing implement
15 operated by the user, said indicating data regarding the position of the writing implement relative to a page, the computer system including (a) means for identifying, from the indicating data, an indication of the start of the note-taking session and an indication of the end of the note-taking session; and (b) storage means for retaining a retrievable record of the received data for the note-taking session, said retrievable record being
20 indicative of said handwritten annotations made by said user on said plurality of pages between the start and end of the note-taking session.

- Accordingly, the present invention provides a system and a method which utilizes one or more forms capable of interacting with a computer system. Whilst the novel method and system of the present invention may be used in conjunction with a
25 single computer system, it is also readily adapted to operate by means of a computer network, such as the Internet.

- Physically, the form is disposed on a surface medium of any suitable structure. However, in a preferred arrangement, the form is disposed on sheet material such as paper or the like which has the coded data printed on it and which allows interaction
30 with the computer system. The coded data is detectable preferably, but not exclusively,

outside the visible spectrum, thereby enabling it to be machine-readable but substantially invisible to the human eye. The form may also include visible material which provides information to a user, such as the application or purpose of the form, and which visible information may be registered or correlate in position with the relevant hidden coded data.

The system also includes a sensing device to convey data from the form to the computer system, and in some instances, to contribute additional data. Again, the sensing device may take a variety of forms but is preferably compact and easily portable. In a particularly preferred arrangement, the sensing device is configured as a pen which is designed to be able to physically mark the interactive form as well as to selectively enable the coded data from the form to be read and transmitted to the computer system. The coded data then provides control information, configured such that designation thereof by a user causes instructions to be applied to the software running on the computer system or network.

The nature of the interaction between the form and the sensing device and the data that each contributes to the computer system may vary. In one arrangement, the coded data on the form is indicative of the identity of the form and of at least one reference point on that form. In another embodiment, the interactive form includes coded data which is indicative of a parameter of the form, whereas the sensing device is operative to provide data regarding its own movement relative to that form to the computer system together with coded data from the form. In yet another arrangement, the form includes the coded data which at least identifies the form, and the sensing device is designed to provide, to the computer system, data based on the form coded data, and also on data which identifies the user of the device.

The system and method employs specially designed printers to print the interactive form. Further these printers constitute or form part of the computer system and are designed to receive data from the sensing device. As indicated above, the system and method of the invention is ideally suited to operate over a network. In this arrangement, the printers are fully integrated into the network and allow for printing of the interactive forms on demand and also for distributing of the forms using a mixture of multi-cast and point-cast communication protocols.

Accordingly, in a preferred form, the present invention provides methods and systems which use a paper and pen based interface for a computer system. This provides many significant benefits over traditional computer systems. The advantage of paper is that it is widely used to display and record information. Further, printed information is easier to read than information displayed on a computer screen. Moreover, paper does not run on batteries, can be read in bright light, or robustly accepts coffee spills or the like and is portable and disposable. Furthermore, the system allows for hand-drawing and hand-writing to be captured which affords greater richness of expression than input via a computer keyboard and mouse.

10 The present invention therefore provides a method and system for capturing, in a computer system, data relating to a note-taking session, making use of novel interactive surface media. It is to be understood in this specification and claims that the term 'note-taking session' refers to any session during which pages are annotated for presentation purposes. In particular, in carrying out the method of the invention, a notepad, (or
15 'whiteboard pad'), is employed to convey information.

Using the invention, participants can communicate graphical ideas on a whiteboard or similar, using interactive surface media. The whiteboard can take the form of a pad of large-format pre-printed pages supported for easy viewing on an easel. Multiple colored pens can be used during a whiteboard session, and the colors used can
20 be reproduced on subsequently printed versions of the pages of a whiteboard session.

Each printed version of page can be timestamped and marked with the name of the author, if desired.

BRIEF DESCRIPTION OF DRAWINGS

Preferred and other embodiments of the invention will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

- 5 Figure 1 is a schematic of a the relationship between a sample printed netpage and its online page description;

Figure 2 is a schematic view of a interaction between a netpage pen, a netpage printer, a netpage page server, and a netpage application server;

- 10 Figure 3 is a schematic view of a high-level structure of a printed netpage and its online page description;

Figure 4a is a plan view showing a structure of a netpage tag;

Figure 4b is a plan view showing a relationship between a set of the tags shown in Figure 4a and a field of view of a netpage sensing device in the form of a netpage pen;

Figure 5a is a plan view showing an alternative structure of a netpage tag;

- 15 Figure 5b is a plan view showing a relationship between a set of the tags shown in Figure 5a and a field of view of a netpage sensing device in the form of a netpage pen;

Figure 5c is a plan view showing an arrangement of nine of the tags shown in Figure 5a where targets are shared between adjacent tags;

- 20 Figure 5d is a plan view showing the interleaving and rotation of the symbols of the four codewords of the tag shown in Figure 5a;

Figure 6 is a schematic view of a set of user interface flow document icons;

Figure 7 is a schematic view of a set of user interface page layout element icons;

Figure 8 is a class diagram representing a conferencing system according to the invention;

- 25 Figure 9 is an access type class diagram;

Figure 10 illustrates the conferencing whiteboard page version numbering system;

Figure 11 illustrates the conference session menu user interface flow;

Figure 12 illustrates the conference session list user interface flow;

Figure 13 illustrates the book conference session user interface flow;

Figure 14 illustrates the user interface flow for a whiteboard page;

5 Figure 15 presents an overall illustration of the user interface flow for a conference session;

Figure 16 shows the book a conference session page;

Figure 17 shows the conference session control page;

Figure 18 shows the session main page;

Figure 19 shows a printed blank whiteboard page;

10 Figure 20 shows the conference session end notice;

Figure 21 shows the compose message page;

Figure 22 is a class diagram representing a whiteboard pad and session;

Figure 23 illustrates a whiteboard pad session user interface flow;

Figure 24 shows a whiteboard pad page; and

15 Figure 25 shows a whiteboard session page.

DETAILED DESCRIPTION OF PREFERRED AND OTHER EMBODIMENTS

Note: Memjet™ is a trademark of Silverbrook Research Pty Ltd, Australia.

In the preferred embodiment, the invention is configured to work with the netpage networked computer system, a summary of which is given below and a detailed description of which is given in our earlier applications, including in particular applications USSN 09/_____ (docket no. NPT002US), USSN 09/_____ (docket no. NPS001US), USSN 09/_____ (docket no. NPP003US), USSN 09/_____ (docket no. NPA002US) and USSN 09/_____ (docket no. IJ52US). It will be appreciated that not every implementation will necessarily embody all or even most of the specific details and extensions described in these applications in relation to the basic system. However, the system is described in its most complete form to assist in understanding the context in which the preferred embodiments and aspects of the present invention operate.

In brief summary, the preferred form of the netpage system employs a computer interface in the form of a mapped surface, that is, a physical surface which contains references to a map of the surface maintained in a computer system. The map references can be queried by an appropriate sensing device. Depending upon the specific implementation, the map references may be encoded visibly or invisibly, and defined in such a way that a local query on the mapped surface yields an unambiguous map reference both within the map and among different maps. The computer system can contain information about features on the mapped surface, and such information can be retrieved based on map references supplied by a sensing device used with the mapped surface. The information thus retrieved can take the form of actions which are initiated by the computer system on behalf of the operator in response to the operator's interaction with the surface features.

In its preferred form, the netpage system relies on the production of, and human interaction with, netpages. These are pages of text, graphics and images printed on ordinary paper or other media, but which work like interactive web pages. Information is encoded on each page using ink which is substantially invisible to the unaided human eye. The ink, however, and thereby the coded data, can be sensed by an optically imaging pen and transmitted to the netpage system.

In the preferred form, active buttons and hyperlinks on each page can be clicked with the pen to request information from the network or to signal preferences to a network server. In one embodiment, text written by hand on a netpage is automatically recognized and converted to computer text in the netpage system, allowing forms to be filled in. In other embodiments, signatures recorded on a netpage are automatically verified, allowing e-commerce transactions to be securely authorized.

As illustrated in Figure 1, a printed netpage 1 can represent a interactive form which can be filled in by the user both physically, on the printed page, and "electronically", via communication between the pen and the netpage system. The example shows a "Request" form containing name and address fields and a submit button. The netpage consists of graphic data 2 printed using visible ink, and coded data 3 printed as a collection of tags 4 using invisible ink. The corresponding page description 5, stored on the netpage network, describes the individual elements of the netpage. In particular it describes the type and spatial extent (zone) of each interactive element (i.e. text field or button in the example), to allow the netpage system to correctly interpret input via the netpage. The submit button 6, for example, has a zone 7 which corresponds to the spatial extent of the corresponding graphic 8.

As illustrated in Figure 2, the netpage pen 101, a preferred form of which is described in our earlier application USSN 09/_____ (docket no. NPS001US), works in conjunction with a netpage printer 601, an Internet-connected printing appliance for home, office or mobile use. The pen is wireless and communicates securely with the netpage printer via a short-range radio link 9.

The netpage printer 601, preferred forms of which are described in our earlier application USSN 09/_____ (docket no. NPP003US) and our co-filed application USSN 09/_____ (docket no. NPS024US), is able to deliver, periodically or on demand, personalized newspapers, magazines, catalogs, brochures and other publications, all printed at high quality as interactive netpages. Unlike a personal computer, the netpage printer is an appliance which can be, for example, wall-mounted adjacent to an area where the morning news is first consumed, such as in a user's kitchen, near a breakfast table, or near the household's point of departure for the day. It also comes in tabletop, desktop, portable and miniature versions.

Netpages printed at their point of consumption combine the ease-of-use of paper with the timeliness and interactivity of an interactive medium.

As shown in Figure 2, the netpage pen 101 interacts with the coded data on a printed netpage 1 and communicates, via a short-range radio link 9, the interaction to a netpage printer. The printer 601 sends the interaction to the relevant netpage page server 10 for interpretation. In appropriate circumstances, the page server sends a corresponding message to application computer software running on a netpage application server 13. The application server may in turn send a response which is printed on the originating printer.

The netpage system is made considerably more convenient in the preferred embodiment by being used in conjunction with high-speed microelectromechanical system (MEMS) based inkjet (Memjet™) printers, for example as described in our earlier application USSN 09/_____ (docket no. IJ52US). In the preferred form of this technology, relatively high-speed and high-quality printing is made more affordable to consumers. In its preferred form, a netpage publication has the physical characteristics of a traditional newsmagazine, such as a set of letter-size glossy pages printed in full color on both sides, bound together for easy navigation and comfortable handling.

The netpage printer exploits the growing availability of broadband Internet access. The netpage printer can also operate with slower connections, but with longer delivery times and lower image quality. The netpage system can also be enabled using existing consumer inkjet and laser printers, although the system will operate more slowly and will therefore be less acceptable from a consumer's point of view. In other embodiments, the netpage system is hosted on a private intranet. In still other embodiments, the netpage system is hosted on a single computer or computer-enabled device, such as a printer.

Netpage publication servers 14 on the netpage network are configured to deliver print-quality publications to netpage printers. Periodical publications are delivered automatically to subscribing netpage printers via pointcasting and multicasting Internet protocols. Personalized publications are filtered and formatted according to individual user profiles.

A netpage printer can be configured to support any number of pens, and a pen

can work with any number of netpage printers. In the preferred implementation, each netpage pen has a unique identifier. A household may have a collection of colored netpage pens, one assigned to each member of the family. This allows each user to maintain a distinct profile with respect to a netpage publication server or application
5 server.

A netpage pen can also be registered with a netpage registration server 11 and linked to one or more payment card accounts. This allows e-commerce payments to be securely authorized using the netpage pen. The netpage registration server compares the signature captured by the netpage pen with a previously registered signature, allowing it
10 to authenticate the user's identity to an e-commerce server. Other biometrics can also be used to verify identity. A version of the netpage pen includes fingerprint scanning, verified in a similar way by the netpage registration server.

Although a netpage printer may deliver periodicals such as the morning newspaper without user intervention, it can be configured never to deliver unsolicited
15 junk mail. In its preferred form, it only delivers periodicals from subscribed or otherwise authorized sources. In this respect, the netpage printer is unlike a fax machine or e-mail account which is visible to any junk mailer who knows the telephone number or e-mail address.

Each object model in the system is described using a Unified Modeling
20 Language (UML) class diagram. A class diagram consists of a set of object classes connected by relationships, and two kinds of relationships are of interest here: associations and generalizations. An association represents some kind of relationship between objects, i.e. between instances of classes. A generalization relates actual classes, and can be understood in the following way: if a class is thought of as the set of all
25 objects of that class, and class A is a generalization of class B, then B is simply a subset of A. Each class is drawn as a rectangle labelled with the name of the class. It contains a list of the attributes of the class, separated from the name by a horizontal line, and a list of the operations of the class, separated from the attribute list by a horizontal line. In the class diagrams which follow, however, operations are never modelled. An association is
30 drawn as a line joining two classes, optionally labelled at either end with the multiplicity of the association. The default multiplicity is one. An asterisk (*) indicates a multiplicity

of “many”, i.e. zero or more. Each association is optionally labelled with its name, and is also optionally labelled at either end with the role of the corresponding class. An open diamond indicates an aggregation association (“is-part-of”), and is drawn at the aggregator end of the association line. A generalization relationship (“is-a”) is drawn as a solid line joining two classes, with an arrow (in the form of an open triangle) at the generalization end. When a class diagram is broken up into multiple diagrams, any class which is duplicated is shown with a dashed outline in all but the main diagram which defines it. It is shown with attributes only where it is defined.

Netpages are the foundation on which a netpage network is built. They provide a paper-based user interface to published information and interactive services. A netpage consists of a printed page (or other surface region) invisibly tagged with references to an online description of the page. The online page description is maintained persistently by a netpage page server. The page description describes the visible layout and content of the page, including text, graphics and images. It also describes the input elements on the page, including buttons, hyperlinks, and input fields. A netpage allows markings made with a netpage pen on its surface to be simultaneously captured and processed by the netpage system.

Multiple netpages can share the same page description. However, to allow input through otherwise identical pages to be distinguished, each netpage is assigned a unique page identifier. This page ID has sufficient precision to distinguish between a very large number of netpages.

Each reference to the page description is encoded in a printed tag. The tag identifies the unique page on which it appears, and thereby indirectly identifies the page description. The tag also identifies its own position on the page. Characteristics of the tags are described in more detail below.

Tags are printed in infrared-absorptive ink on any substrate which is infrared-reflective, such as ordinary paper. Near-infrared wavelengths are invisible to the human eye but are easily sensed by a solid-state image sensor with an appropriate filter.

A tag is sensed by an area image sensor in the netpage pen, and the tag data is transmitted to the netpage system via the nearest netpage printer. The pen is wireless and communicates with the netpage printer via a short-range radio link. Tags are sufficiently

small and densely arranged that the pen can reliably image at least one tag even on a single click on the page. It is important that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless. Tags are error-correctably encoded to make them partially tolerant to surface damage.

- 5 The netpage page server maintains a unique page instance for each printed netpage, allowing it to maintain a distinct set of user-supplied values for input fields in the page description for each printed netpage.

- 10 The relationship between the page description, the page instance, and the printed netpage is shown in Figure 3. The printed netpage may be part of a printed netpage document 45. The page instance is associated with both the netpage printer which printed it and, if known, the netpage user who requested it.

- 15 In a preferred form, each tag identifies the region in which it appears, and the location of that tag within the region. A tag may also contain flags which relate to the region as a whole or to the tag. One or more flag bits may, for example, signal a tag sensing device to provide feedback indicative of a function associated with the immediate area of the tag, without the sensing device having to refer to a description of the region. A netpage pen may, for example, illuminate an "active area" LED when in the zone of a hyperlink.

- 20 In a preferred embodiment, each tag contains an easily recognized invariant structure which aids initial detection, and which assists in minimizing the effect of any warp induced by the surface or by the sensing process. The tags preferably tile the entire page, and are sufficiently small and densely arranged that the pen can reliably image at least one tag even on a single click on the page. It is important that the pen recognize the page ID and position on every interaction with the page, since the interaction is stateless.

- 25 In a preferred embodiment, the region to which a tag refers coincides with an entire page, and the region ID encoded in the tag is therefore synonymous with the page ID of the page on which the tag appears. In other embodiments, the region to which a tag refers can be an arbitrary subregion of a page or other surface. For example, it can coincide with the zone of an interactive element, in which case the region ID can directly
30 identify the interactive element.

Each tag contains typically contains 16 bits of tag ID, at least 90 bits of region ID, and a number of flag bits. Assuming a maximum tag density of 64 per square inch, a 16-bit tag ID supports a region size of up to 1024 square inches. Larger regions can be mapped continuously without increasing the tag ID precision simply by using abutting regions and maps. The distinction between a region ID and a tag ID is mostly one of convenience. For most purposes the concatenation of the two can be considered as a globally unique tag ID. Conversely, it may also be convenient to introduce structure into the tag ID, for example to define the x and y coordinates of the tag. A 90-bit region ID allows 2^{90} ($\sim 10^{27}$ or a thousand trillion trillion) different regions to be uniquely identified. Tags may also contain type information, and a region may be tagged with a mixture of tag types. For example, a region may be tagged with one set of tags encoding x coordinates and another set, interleaved with the first, encoding y coordinates.

In one embodiment, 120 bits of tag data are redundantly encoded using a (15, 5) Reed-Solomon code. This yields 360 encoded bits consisting of 6 codewords of 15 4-bit symbols each. The (15, 5) code allows up to 5 symbol errors to be corrected per codeword, i.e. it is tolerant of a symbol error rate of up to 33% per codeword. Each 4-bit symbol is represented in a spatially coherent way in the tag, and the symbols of the six codewords are interleaved spatially within the tag. This ensures that a burst error (an error affecting multiple spatially adjacent bits) damages a minimum number of symbols overall and a minimum number of symbols in any one codeword, thus maximising the likelihood that the burst error can be fully corrected.

Any suitable error-correcting code can be used in place of a (15, 5) Reed-Solomon code, for example a Reed-Solomon code with more or less redundancy, with the same or different symbol and codeword sizes; another block code; or a different kind of code, such as a convolutional code (see, for example, Stephen B. Wicker, Error Control Systems for Digital Communication and Storage, Prentice-Hall 1995, the contents of which are herein incorporated by cross-reference).

One embodiment of the physical representation of the tag, shown in Figure 4a and described in our earlier application USSN 09/_____ (docket no. NPT002US), includes fixed target structures 15, 16, 17 and variable data areas 18. The fixed target structures allow a sensing device such as the netpage pen to detect the tag and infer its

three-dimensional orientation relative to the sensor. The data areas contain representations of the individual bits of the encoded tag data. To maximise its size, each data bit is represented by a radial wedge in the form of an area bounded by two radial lines and two concentric circular arcs. Each wedge has a minimum dimension of 8 dots at 1600 dpi and is designed so that its base (its inner arc), is at least equal to this minimum dimension. The height of the wedge in the radial direction is always equal to the minimum dimension. Each 4-bit data symbol is represented by an array of 2x2 wedges. The fifteen 4-bit data symbols of each of the six codewords are allocated to the four concentric symbol rings 18a to 18d in interleaved fashion. Symbols are allocated alternately in circular progression around the tag. The interleaving is designed to maximise the average spatial distance between any two symbols of the same codeword.

In order to support "single-click" interaction with a tagged region via a sensing device, the sensing device must be able to see at least one entire tag in its field of view no matter where in the region or at what orientation it is positioned. The required diameter of the field of view of the sensing device is therefore a function of the size and spacing of the tags. Assuming a circular tag shape, the minimum diameter of the sensor field of view 193 is obtained when the tags are tiled on a equilateral triangular grid, as shown in Figure 4b.

The tag structure just described is designed to allow both regular tilings of planar surfaces and irregular tilings of non-planar surfaces. Regular tilings are not, in general, possible on non-planar surfaces. In the more usual case of planar surfaces where regular tilings of tags are possible, i.e. surfaces such as sheets of paper and the like, more efficient tag structures can be used which exploit the regular nature of the tiling.

An alternative tag structure more suited to a regular tiling is shown in Figure 5a. The tag 4 is square and has four perspective targets 17. It is similar in structure to tags described by Bennett et al. in US Patent 5,051,746. The tag represents sixty 4-bit Reed-Solomon symbols 47, for a total of 240 bits. The tag represents each one bit as a dot 48, and each zero bit by the absence of the corresponding dot. The perspective targets are designed to be shared between adjacent tags, as shown in Figures 5b and 5c. Figure 5b shows a square tiling of 16 tags and the corresponding minimum field of view 193, which must span the diagonals of two tags. Figure 5c shows a square tiling of nine tags,

containing all one bits for illustration purposes.

Using a (15, 7) Reed-Solomon code, 112 bits of tag data are redundantly encoded to produce 240 encoded bits. The four codewords are interleaved spatially within the tag to maximize resilience to burst errors. Assuming a 16-bit tag ID as before, this allows a region ID of up to 92 bits. The data-bearing dots 48 of the tag are designed to not overlap their neighbors, so that groups of tags cannot produce structures which resemble targets. This also saves ink. The perspective targets therefore allow detection of the tag, so further targets are not required.

Although the tag may contain an orientation feature to allow disambiguation of the four possible orientations of the tag relative to the sensor, it is also possible to embed orientation data in the tag data. For example, the four codewords can be arranged so that each tag orientation contains one codeword placed at that orientation, as shown in Figure 5d, where each symbol is labelled with the number of its codeword (1-4) and the position of the symbol within the codeword (A-O). Tag decoding then consists of decoding one codeword at each orientation. Each codeword can either contain a single bit indicating whether it is the first codeword, or two bits indicating which codeword it is. The latter approach has the advantage that if, say, the data content of only one codeword is required, then at most two codewords need to be decoded to obtain the desired data. This may be the case if the region ID is not expected to change within a stroke and is thus only decoded at the start of a stroke. Within a stroke only the codeword containing the tag ID is then desired. Furthermore, since the rotation of the sensing device changes slowly and predictably within a stroke, only one codeword typically needs to be decoded per frame.

It is possible to dispense with perspective targets altogether and instead rely on the data representation being self-registering. In this case each bit value (or multi-bit value) is typically represented by an explicit glyph, i.e. no bit value is represented by the absence of a glyph. This ensures that the data grid is well-populated, and thus allows the grid to be reliably identified and its perspective distortion detected and subsequently corrected during data sampling. To allow tag boundaries to be detected, each tag data must contain a marker pattern, and these must be redundantly encoded to allow reliable detection. The overhead of such marker patterns is similar to the overhead of explicit

perspective targets. One such scheme uses dots positioned at various points relative to grid vertices to represent different glyphs and hence different multi-bit values (see Anoto Technology Description, Anoto April 2000).

Decoding a tag results in a region ID, a tag ID, and a tag-relative pen transform.

- 5 Before the tag ID and the tag-relative pen location can be translated into an absolute location within the tagged region, the location of the tag within the region must be known. This is given by a tag map, a function which maps each tag ID in a tagged region to a corresponding location. A tag map reflects the scheme used to tile the surface region with tags, and this can vary according to surface type. When multiple tagged regions
- 10 share the same tiling scheme and the same tag numbering scheme, they can also share the same tag map. The tag map for a region must be retrievable via the region ID. Thus, given a region ID, a tag ID and a pen transform, the tag map can be retrieved, the tag ID can be translated into an absolute tag location within the region, and the tag-relative pen location can be added to the tag location to yield an absolute pen location within the
- 15 region.

- The tag ID may have a structure which assists translation through the tag map. It may, for example, encoded cartesian coordinates or polar coordinates, depending on the surface type on which it appears. The tag ID structure is dictated by and known to the tag map, and tag IDs associated with different tag maps may therefore have different
- 20 structures.

Two distinct surface coding schemes are of interest, both of which use the tag structure described earlier in this section. The preferred coding scheme uses “location-indicating” tags as already discussed. An alternative coding scheme uses “object-indicating” (or “function-indicating”) tags.

- 25 A location-indicating tag contains a tag ID which, when translated through the tag map associated with the tagged region, yields a unique tag location within the region. The tag-relative location of the pen is added to this tag location to yield the location of the pen within the region. This in turn is used to determine the location of the pen relative to a user interface element in the page description associated with the region.
- 30 Not only is the user interface element itself identified, but a location relative to the user interface element is identified. Location-indicating tags therefore trivially support the

capture of an absolute pen path in the zone of a particular user interface element.

An object-indicating (or function-indicating) tag contains a tag ID which directly identifies a user interface element in the page description associated with the region (or equivalently, a function). All the tags in the zone of the user interface element
5 identify the user interface element, making them all identical and therefore indistinguishable. Object-indicating tags do not, therefore, support the capture of an absolute pen path. They do, however, support the capture of a relative pen path. So long as the position sampling frequency exceeds twice the encountered tag frequency, the displacement from one sampled pen position to the next within a stroke can be
10 unambiguously determined. As an alternative, the netpage pen 101 can contain a pair or motion-sensing accelerometers, as described in our earlier application USSN 09/_____ (docket no. NPS001US).

With either tagging scheme, the tags function in cooperation with associated visual elements on the netpage as user interactive elements in that a user can interact
15 with the printed page using an appropriate sensing device in order for tag data to be read by the sensing device and for an appropriate response to be generated in the netpage system.

Each application user interface flow is illustrated as a collection of documents linked by command arrows. A command arrow indicates that the target document is
20 printed as a result of the user pressing the corresponding command button on the source page. Some command arrows are labelled with multiple commands separated by slashes ('/'), indicating that any one of the specified commands causes the target document to be printed. Although multiple commands may label the same command arrow, they typically have different side-effects.

25 In application terms, it is important to distinguish between netpage documents and netpage forms. Documents contain printed information, as well as command buttons which can be pressed by the user to request further information or some other action. Forms, in addition to behaving like normal documents, also contain input fields which can be filled in by the user. They provide the system with a data input mechanism. It is
30 also useful to distinguish between documents which contain generic information and documents which contain information specific to a particular interaction between the

user and an application. Generic documents may be pre-printed publications such as magazines sold at news stands or advertising posters encountered in public places. Forms may also be pre-printed, including, for example, subscription forms encountered in pre-printed publications. They may, of course, also be generated on-the-fly by a netpage printer in response to user requests. User-specific documents and forms are normally generated on the fly by a netpage printer in response to user requests. Figure 6 shows a generic document 990, a generic form 991, a user-specific document 992, and a user-specific form 993.

Netpages which participate in a user interface flow are further described by abstract page layouts. A page layout may contain various kinds of elements, each of which has a unique style to differentiate it from the others. As shown in Figure 7, these include fixed information 994, variable information 995, input fields 996, command buttons 997, draggable commands 998, and text hyperlinks or hypertext links 999.

When a user interface flow is broken up into multiple diagrams, any document which is duplicated is shown with dashed outlines in all but the main diagram which defines it.

REMOTE CONFERENCING USING THE NETPAGE SYSTEM

The netpage system, then, provides the facility for enabling remote conferencing, allowing geographically distributed participants to communicate graphical ideas via a shared whiteboard while engaged in a telephone conference or similar. Every time a participant adds a modification or a new piece of graphical information to the whiteboard the other participants are provided with an updated copy of the page. Each netpage or netpage document used during a conference session, such as a Conference Session Control Page (see below) or a version of a whiteboard which a participant is marking up, is a physical representation of what is referred to herein as a “conferencing form”, containing the interactive objects (hyperlinks and form fields).

New whiteboard pages can be started at any time, but older pages or older versions of pages can still be marked up and re-distributed. Each participant ends up with a full history of the interaction.

APPLICATION DRAWING NOTATION

Each application user interface flow is illustrated as a collection of documents

linked by command arrows. A command arrow indicates that the target document is printed as a result of the user pressing the corresponding command button on the source page. Some command arrows are labelled with multiple commands separated by slashes ('/'), indicating that any one of the specified commands causes the target document to be printed. Although multiple commands may label the same command arrow, they typically have different side-effects.

In application terms, it is important to distinguish between netpage documents and netpage forms. Documents contain printed information, as well as command buttons which can be pressed by the user to request further information or some other action. Forms, in addition to behaving like normal documents, also contain input fields which can be filled in by the user. They provide the system with a data input mechanism. It is also useful to distinguish between documents which contain generic information and documents which contain information specific to a particular interaction between the user and an application. Generic documents may be pre-printed publications such as magazines sold at news stands or advertising posters encountered in public places. Forms may also be pre-printed, including, for example, subscription forms encountered in pre-printed publications. They may, of course, also be generated on-the-fly by a netpage printer in response to user requests. User-specific documents and forms are normally generated on the fly by a netpage printer in response to user requests. Figure 44 shows a generic document 990, a generic form 991, a user-specific document 992, and a user-specific form 993.

Netpages which participate in a user interface flow are further described by abstract page layouts. A page layout may contain various kinds of elements, each of which has a unique style to differentiate it from the others. As shown in Figure 45, these include fixed information 994, variable information 995, input fields 996, command buttons 997, draggable commands 998, and text hyperlinks or hypertext links 999.

When a user interface flow is broken up into multiple diagrams, any document which is duplicated is shown with dashed outlines in all but the main diagram which defines it.

30 CONFERENCING OBJECT MODEL

The conferencing object model revolves around a conference session, a set of

versioned whiteboard pages, and session participants. The conferencing class diagram is shown in Figure 8.

Each conference participant 502 is a netpage user 800, and has an access type 505 for a session, controlling the functions to which they have access. The access type specifies, for example, whether a participant is merely an observer, or whether he/she is permitted to make page markups, send messages, etc. The possible access types are chairperson 509, organizer 510, author 511, markup allowed 512 and observer 513. The Access Type class diagram is shown in Figure 9.

Each conference session 500 has a unique session identifier 507, a session description, a planned start and end time, an actual start and end time, comments, and a status (indicating if the session is booked, in progress, finished or cancelled).

Associated with a conference session is a conference whiteboard made up of whiteboard pages 503, each of which may have a number of versions 504 associated with it. A version 504 is uniquely identified by a version number 508. Each version has a line style 506.

Before a session begins the whiteboard is empty. As the session progresses participants create new whiteboard pages, or make markups to existing whiteboard pages. Each time a markup is made and submitted by a participant, a new version of that whiteboard page is created. Each version records the date and time the version was created, the user who made the markups, and the markup content. In addition, each page version is also linked to the version of the page that was marked up to create this version. In this way a “tree” of versions is created for each white-board page, recording all the markups made during the session.

The first whiteboard page version is version 0 515. If this version is modified, version 1 516 is created. If version 1 is modified, version 2 is created, and so on. This is called the ‘main branch’ of the tree. If, however, at some stage during the session a user modifies an older version of the page, then the version numbering system branches. If a user later modifies version 1 then the tree branches and a new version 1.1 517 is created. An example of this version numbering system is shown in Figure 10. In this way, the evolution of each page (and thereby the information exchange process of the conference) can be clearly reviewed at any stage of the session.

CONFERENCING USER INTERFACE

A user may obtain the Conference Session Menu 518 (not shown) from a variety of links including, for example:

- a personalized bookmark kept by or available to the netpage user
- 5 • the help menu 46 of the user's netpage printer

The Conference Session Menu user interface flow is shown in Figure 11.

Optionally, security can be added to the conference session by adding signature verification at key points. A signature can be required, for example, on the session main page before a participant is allowed to send any markups.

10 Book a Conference Session

A user may book a new conference session by clicking <Book New Session> on the Conference Session Menu 518. The Book A Conference Session page 519 is printed, shown in Figure 16. The user who creates a new conference session is referred to as the 'organizer'. The Book Conference Session user interface flow is shown
15 in Figure 13.

To create a session the user specifies a short session description, the planned start date and time, and the planned end time for the session.

The user also specifies the participants to be invited to the session. One participant on the list may be flagged as the chairperson for the conference. If none is
20 specified then, by default, the organizer is the chairperson. Participants may also be flagged as observers, observers having access types such that they may receive the whiteboard pages and all markups, but are not able to submit markups. The user may click the <Add Invitees> button 533 to obtain their contact list 523 (not shown) and select the participants.

25 Finally, for information purposes, the user may also include some comments relating to the session and its purpose.

When the details are complete the user clicks the <Send Invitation> button 534 to send the session invitation 524 to the participants via a netpage e-mail.

8.3.2 Conference Session List

30 The user can print a list of their conference sessions by selecting the <List

Sessions> button from the Conference Session Menu 518. The Conference Session List 520 (not shown) shows all sessions in which the user is a participant. For each session the list shows the session description, the user's access type for that session, the start date and time for the session, and the session's status.

- 5 The Conference Session List user interface flow is shown in Figure 12. From the Conference Session List 520 the user can cancel a session by clicking the <Cancel> button, or click <Details> to see the full details of the session. If the user cancels a session a Session Cancelled Notice 521 (not shown) is sent to participants. If the session has not yet started, selecting <Details> prints a Conference Session Control Page 522 (see below). The session action buttons <Start Session> and <End Session> are only printed if the user is the meeting chairperson.

Conference Session Control

- 15 A user may start a conference session by selecting <Details> for the session from the Session List. If the session has not yet started then the Conference Session Control Page 522 is printed, shown in Figure 17. If the user is the session chairperson, all the session action buttons are printed.

The chairperson clicks <Start Session> 535 to begin the conference session, and a Session Main Page 526 is printed on the netpage printer of each participant (Figure 18). The conference session then proceeds.

- 20 The chairperson clicks <End Session> 536 to end the current conference session. After this no more page markups can be submitted by the participants, and a Conference Session End Notice 532 is sent to all participants, shown in Figure 20.

- 25 At any time during or after a conference session, the chairperson may view the history 525 of the whiteboard markups by clicking <View History> 537. The tree view of page versions is printed, with each version being shown as a thumbnail image together with its version number and the name of the user who created it. The chairperson can then print a full size copy of the page version by clicking on it.

- 30 At any time during or after a markup session, a user may list messages sent during the session. The message list 528 only shows messages which were addressed to the user.

A Conference Session

The user interface flow for a conference session is shown in Figure 15.

As explained above, when the session is started by the chairperson a Session Main Page 526 is printed on the netpage printer of each participant. The Session Main Page, shown in Figure 18, gives the session details, the participants' names and access types.

If the user clicks the <New Page> 539 button on the Session Main Page, a blank whiteboard page (Figure 19) is printed.

If the user clicks the <Print Palette> button on the Session Main Page, a palette 529 (not shown) of available line styles and colors is printed. The user can select the line style and color to use when writing on the whiteboard page. The palette choice can be changed at any time during the session. The current line style and color becomes a property of any captured digital ink.

During a session a participant can send a message 531 to the other participants, the message 531 printing directly onto the netpage printer of the addressees. The messages are recorded against the conference session, and may be printed at any time during or after the session, but messages can of course only be viewed by the message addressees. To send a message the user clicks the <Send Message> button and the Compose Message page 530 is printed, as shown in Figure 21.

The whiteboard page 527 is shown in Figure 19. The top of the whiteboard page shows the session description, whiteboard page number, version number, the current date and time, and the name of the participant who made the latest markups.

The page version may be reprinted, discarding any markups made on the page by the user, by clicking the <Reprint> button.

The user can select content on another netpage using an available netpage selection mechanism (e.g. by 'lassoing' and selecting the desired content from another netpage with the netpage pen). The user can then paste the selected content to the whiteboard page by drawing a line from the <Paste> icon to the desired paste point on the page.

If at any stage the user clicks the <Update> button then their marked-up whiteboard page is stored as a new version and is sent to all session participants.

If the user clicks the <New Page> button a blank whiteboard page is printed on their printer, as shown in Figure 19.

The user interface flow for a whiteboard page is shown in Figure 14, whilst the user interface flow for a conference session is shown in Figure 15.

5 The tree view of page versions is printed on the back of each whiteboard page. If the entire tree does not fit on one page then as much as possible of the current branch is shown. Each version is shown as a thumbnail image, and beside the image is the version number and the update user name. The user can then print a full size copy of the page version by clicking on it.

10 As explained above, once the chairperson has ended a current conference session, no more page markups can be submitted by the participants, and a Conference Session End Notice 532 (Figure 20) is sent to all participants.

WHITEBOARD SESSIONS USING THE NETPAGE SYSTEM

15 Additionally, then, the netpage system can be employed in the provision of a whiteboard facility for users in an educational or meeting environment who are not geographically remote from one another.

NETPAGE WHITEBOARD PAD APPLICATION

20 An easel holding a pad of large-format (e.g. A1 or A0) pre-printed netpage paper acts as the whiteboard. Participants in a meeting can collaboratively mark up the physical pages, and at the end of the meeting can print out a reduced-size version of the whiteboard pages, such as an A4 version, conveniently bound and timestamped. Multiple colored netpage pens can be used during a session, and since each pen can inform the system of its color and style, the reduced pages can faithfully reproduce the colors used.

25 The whiteboard pad application records each page of a pre-printed whiteboard pad as belonging to a particular pad, as shown in the Whiteboard Pad and Session class diagram in Figure 22. When a user starts a new session 541, the application records the pad page 542 through which the user starts the session 541 as being the first page of the session. Any other pages belonging to the same pad 540 which are marked by a user using a netpage pen while the session is active are also recorded as belonging to the
30 session.

Each pad page 543 contains pre-printed buttons for starting, ending and printing a session, as shown in Figure 24. As shown in the user interface flow in Figure 23, when a user presses the <start session> button 547, the application prints a session start page 544 which gives the start time of the session. When a session is active in relation to a particular pad, any attempt to start a new session elicits an error report.

Alternatively or additionally, the application may be configured such that, if the user marks a pad page when no session is active, a new session is automatically started.

When the user presses the <end session> button 548, the application prints a session end page 545 which gives the start and end times of the session. When no session is active in relation to a particular pad, any attempt to end a session elicits an error report.

Each pad page 543, as well as the session start page 544 and the session end page 545, provides a <print session> button 549 which can be used at any time to print the pages of the corresponding session. Each session page 546 is printed with the session start and end dates and times, as well as a page number within the session, as shown in Figure 25.

As an alternative to the above, the whiteboard pad comprises essentially blank pages, preprinted with coded data for detection by the netpage pen, and the pad is provided on a cardboard or other backing sheet. The backing sheet extends beyond the periphery of the pages, for example below the bottom of the pages, to provide a projecting margin which includes a single set of session control buttons. These can be used to control any number of sessions held using the pad, although only one session at a time, of course. Because the whiteboard pad application knows which pad the control buttons belong to, it knows which pad, and therefore which session, the control buttons operate on.

CONCLUSION

The present invention has been described with reference to a preferred embodiment and number of specific alternative embodiments. However, it will be appreciated by those skilled in the relevant fields that a number of other embodiments, differing from those specifically described, will also fall within the spirit and scope of

code	name	code	name
001	001	001	001
002	002	002	002
003	003	003	003
004	004	004	004
005	005	005	005
006	006	006	006
007	007	007	007
008	008	008	008
009	009	009	009
010	010	010	010
011	011	011	011
012	012	012	012
013	013	013	013
014	014	014	014
015	015	015	015
016	016	016	016
017	017	017	017
018	018	018	018
019	019	019	019
020	020	020	020
021	021	021	021
022	022	022	022
023	023	023	023
024	024	024	024
025	025	025	025
026	026	026	026
027	027	027	027
028	028	028	028
029	029	029	029
030	030	030	030
031	031	031	031
032	032	032	032
033	033	033	033
034	034	034	034
035	035	035	035
036	036	036	036
037	037	037	037
038	038	038	038
039	039	039	039
040	040	040	040
041	041	041	041
042	042	042	042
043	043	043	043
044	044	044	044
045	045	045	045
046	046	046	046
047	047	047	047
048	048	048	048
049	049	049	049
050	050	050	050
051	051	051	051
052	052	052	052
053	053	053	053
054	054	054	054
055	055	055	055
056	056	056	056
057	057	057	057
058	058	058	058
059	059	059	059
060	060	060	060
061	061	061	061
062	062	062	062
063	063	063	063
064	064	064	064
065	065	065	065
066	066	066	066
067	067	067	067
068	068	068	068
069	069	069	069
070	070	070	070
071	071	071	071
072	072	072	072
073	073	073	073
074	074	074	074
075	075	075	075
076	076	076	076
077	077	077	077
078	078	078	078
079	079	079	079
080	080	080	080
081	081	081	081
082	082	082	082
083	083	083	083
084	084	084	084
085	085	085	085
086	086	086	086
087	087	087	087
088	088	088	088
089	089	089	089
090	090	090	090
091	091	091	091
092	092	092	092
093	093	093	093
094	094	094	094

CLAIMS

1. A method of capturing, in a computer system, data relating to a note-taking session, the session consisting of handwritten annotations made by a user by way of a writing implement on a plurality of pages, the method including the steps of:

receiving, in the computer system and via the writing implement, an indication of the start of the note-taking session;

receiving, in the computer system and via the writing implement, data indicative of said handwritten annotations made by said user on said plurality of pages;

- 10 receiving, in the computer system and via the writing implement, an indication of the end of the note-taking session; and

retaining a retrievable record of the received data for the note-taking session.

2. A method according to claim 1, wherein each of said pages includes coded data indicative of at least one reference point of the page, and said writing implement includes a sensor for detecting said coded data.

3. A method according to claim 1, wherein each of the pages includes coded data indicative of an identity of the page, and said writing implement includes a sensor for detecting said coded data.

4. A method according to claim 2 or claim 3, the coded data being substantially invisible in the visible spectrum.

- 25 5. A method according to claim 1, wherein said indication of the start of the note-taking session is provided by the computer system receiving data indicative of said handwritten annotations made by said user on said plurality of pages.

6. A method according to claim 1, wherein said plurality of pages is associated with a control portion comprising at least one control zone, the computer system receiving an indication via said writing implement that said user has designated one or more control zones using the writing implement.

5

7. A method according to claim 6, wherein one or more of said pages includes said control portion.

8. A method according to claim 6, wherein said plurality of pages are provided in the form of a notepad, the notepad includes said control portion on a part of the notepad other than on one of said pages.

9. A method according to claim 6, wherein said at least one control zone includes a zone associated with the start of the note-taking session, and said indication of the start of the note-taking session is provided by the computer system receiving an indication that said user has designated said zone by way of said writing implement.

10. A method according to claim 6, wherein said at least one control zone includes a zone associated with the end of the note-taking session, and said indication of the end of the note-taking session is provided by the computer system receiving an indication that said user has designated said zone by way of said writing implement.

11. A method according to claim 1, wherein said writing implement includes a writing nib, and said writing nib is associated with a sensor able to detect nib contact with one of said plurality of pages.

12. A method according to claim 1 including the step of using said retrievable record to selectively print the data indicative of said handwritten annotations.

13. A method according to claim 12, wherein said plurality of pages is associated with a control portion including a zone associated with the printing of the note-taking session, the computer system receiving an indication via said writing implement that said user has designated said zone using the writing implement.

14. A method according to claim 12, the data being printable on a plurality of pages corresponding to the plurality of pages annotated in the note-taking session.

15. A method according to claim 14 including the step of binding the plurality of printed pages.

16. The method of claim 1 in which the writing implement contains an identification means which imparts a unique identity to the sensing device and identifies it as being associated with a particular user in said note-taking session and in which the method includes monitoring, in the computer system, said identity.

17. A system for capturing data relating to a note-taking session, the session consisting of handwritten annotations made by a user by way of a writing implement on a plurality of pages, the system including:

a computer system for receiving indicating data via the writing implement operated by the user, said indicating data regarding the position of the writing implement relative to a page, the computer system including (a) means for identifying, from the indicating data, an indication of the start of the note-taking session and an indication of the end of the note-taking session; and (b) storage means for retaining a retrievable record of the received data for the note-taking session, said retrievable record being indicative of said handwritten annotations made by said user on said plurality of pages between the start and end of the note-taking session.

18. A system according to claim 17, including a plurality of pages, each page including coded data indicative of at least one reference point of the page, said indicating data regarding the position of the writing implement relative to a page being sensed by the writing implement using at least some of the coded data.

5

19. A system according to claim 18, wherein each page includes coded data indicative of an identity of the page, and said indicating data regards both the position of the writing implement relative to a page and the identity of the page.

10 20. A system according to claim 18, wherein the coded data is substantially invisible in the visible spectrum.

21. A system according to claim 18 including a writing implement which includes a sensor for detecting said coded data.

15

22. A system according to claim 21, wherein said writing implement includes a writing nib, and said writing nib is associated with a sensor able to detect nib contact with one of said plurality of pages.

20 23. A system according to claim 21, in which the writing implement contains an identification means which imparts a unique identity to the sensing device and identifies it as being associated with a particular user in said note-taking session, the computer system including means for monitoring said identity.

25 24. A system according to claim 17 including a plurality of pages, said plurality of pages being associated with a control portion comprising at least one control zone, the computer system receiving an indication via said writing implement that said user has designated one or more control zones using the writing implement.

25. A system according to claim 24, wherein one or more of said pages includes said control portion.

5 26. A system according to claim 24 including at least one notepad incorporating said plurality of pages, the at least one notepad including said control portion on a part of the notepad other than on one of said pages.

10 27. A system according to claim 26, said plurality of pages being superposed and joined together on a backing sheet, the backing sheet sized to extend beyond at least one edge of the superposed plurality of pages to provide an uncovered extended part, said control portion being provided on said extended part of the backing sheet.

15 28. A system according to claim 24, wherein said at least one control zone includes a session start zone, said means for identifying an indication of the start of the note-taking session comprises means for receiving an indication that said user has designated said zone by way of said writing implement.

20 29. A system according to claim 24, wherein said at least one control zone includes a session end zone, said means for identifying an indication of the end of the note-taking session comprises means for receiving an indication that said user has designated said zone by way of said writing implement.

25 30. A system according to claim 24, wherein said at least one control zone includes a print zone, said system including means for receiving an indication that said user has designated said print zone by way of said writing implement and means, in response to said indication, to print from said retrievable record data indicative of said handwritten annotations.

ABSTRACT

The invention concerns a system and method capturing, in a computer system, data relating to a note-taking session, the session consisting of handwritten annotations
5 made by a user by way of a writing implement on a plurality of pages.

Specifically, the method includes the steps of receiving, in the computer system and via the writing implement, an indication of the start of the note-taking session, receiving, in the computer system and via the writing implement, data indicative of said handwritten annotations made by said user on said plurality of pages, receiving, in the
10 computer system and via the writing implement, an indication of the end of the note-taking session, and retaining a retrievable record of the received data for the note-taking session. Control for the note-taking session (eg. starting, ending and printing a session) takes place by way of printed command buttons for designation by the writing implement, which buttons may be printed on each page, or on a part of a backing sheet
15 of a notepad of pages extending beyond the periphery of the pages themselves.

The system and method of the invention are suitable for use in an educational environment or a meeting environment. For example, participants in a meeting can collaboratively mark up the physical pages of a whiteboard pad, and at the end of the meeting can print out a reduced-size version of those marked pages, conveniently bound
20 and timestamped.

(Figure 22)

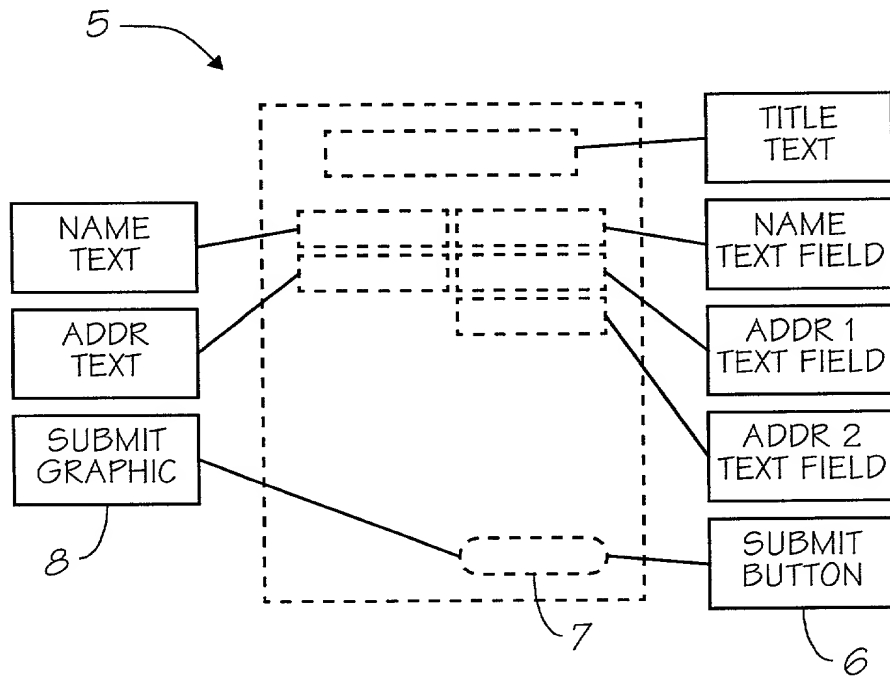
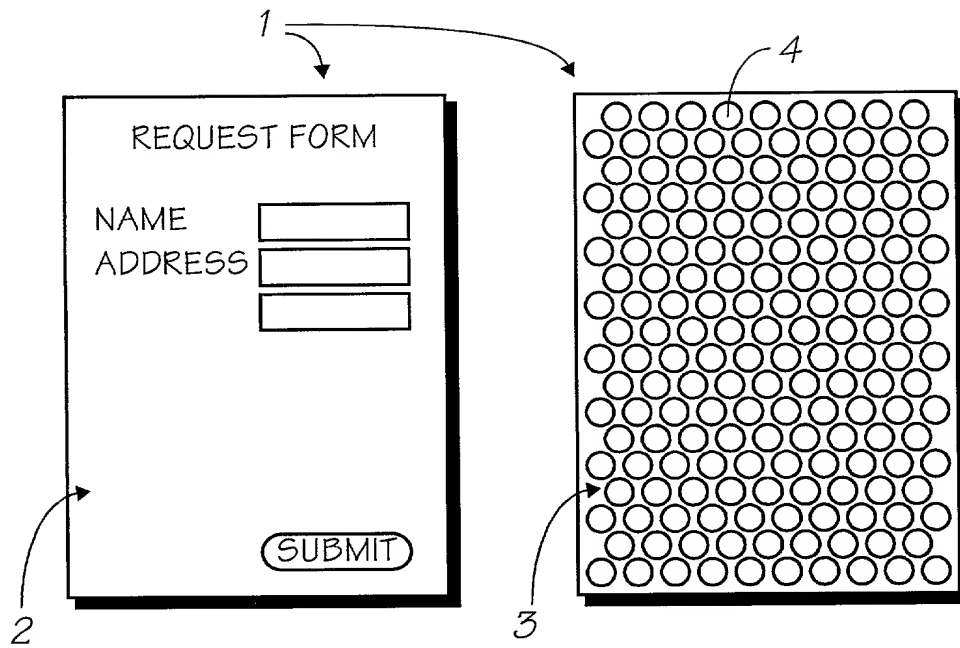


FIG. 1

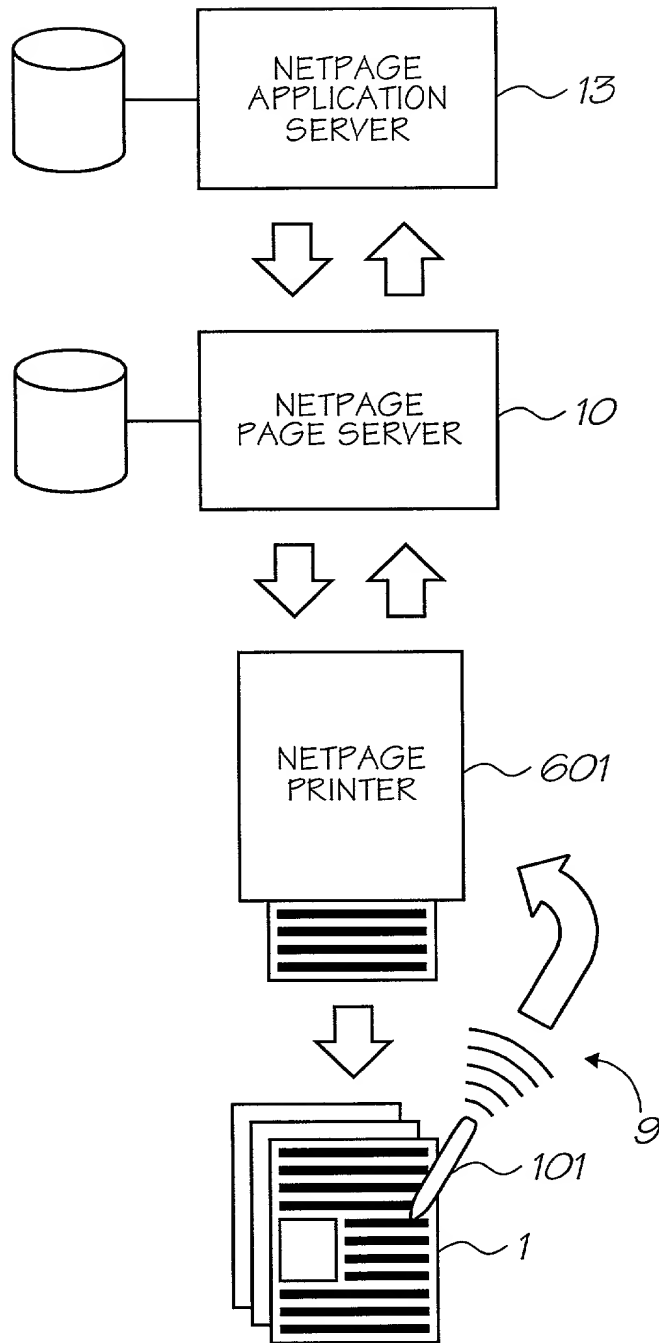


FIG. 2

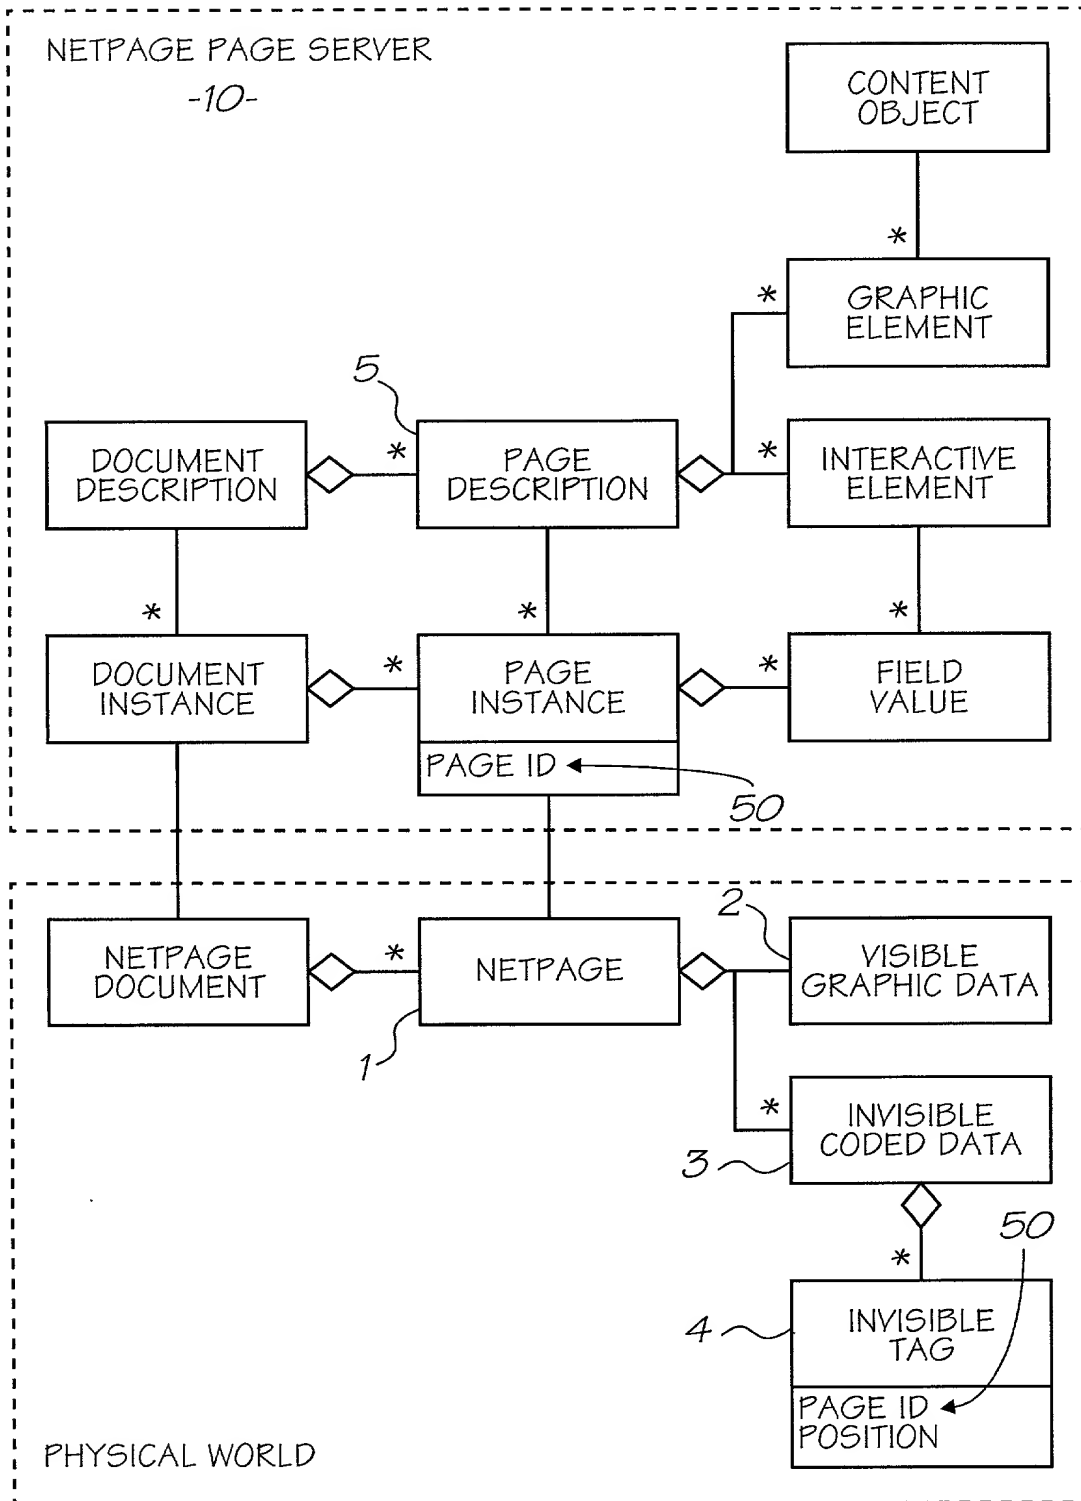


FIG. 3

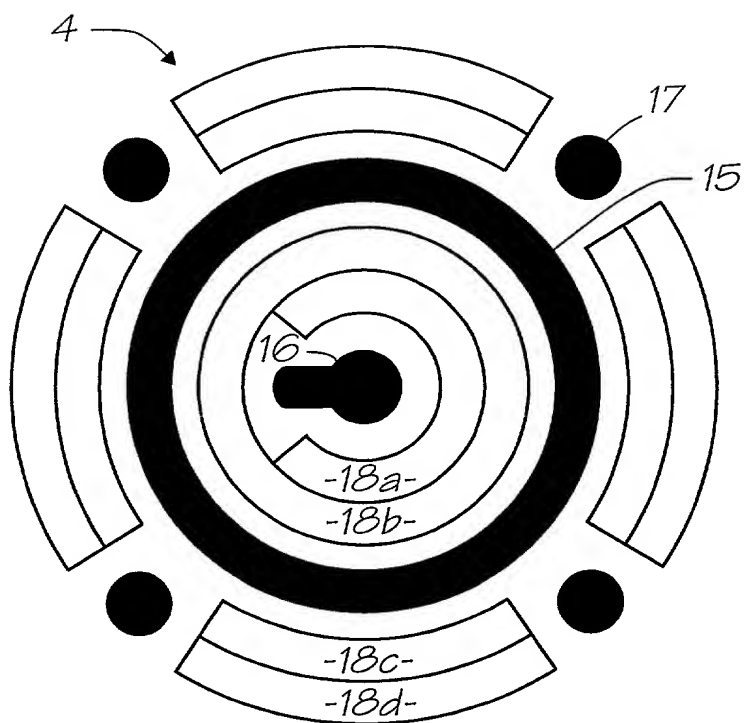


FIG. 4a

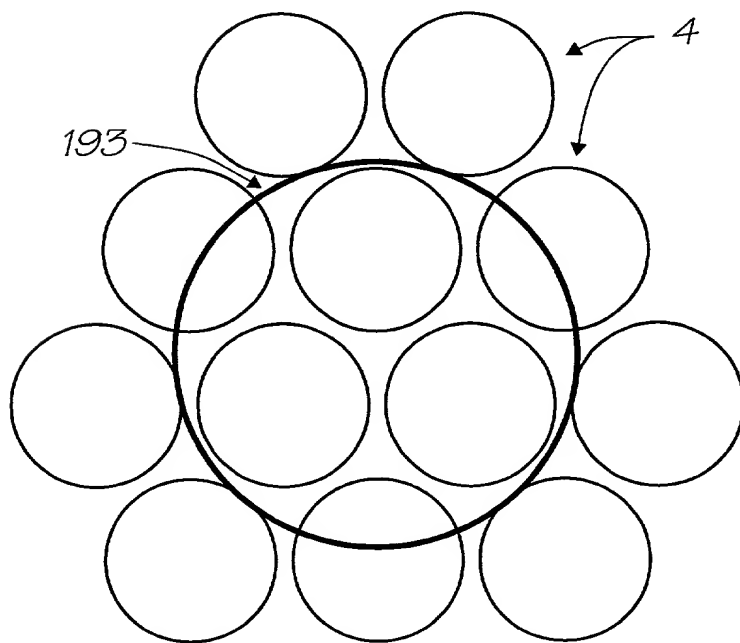


FIG. 4b

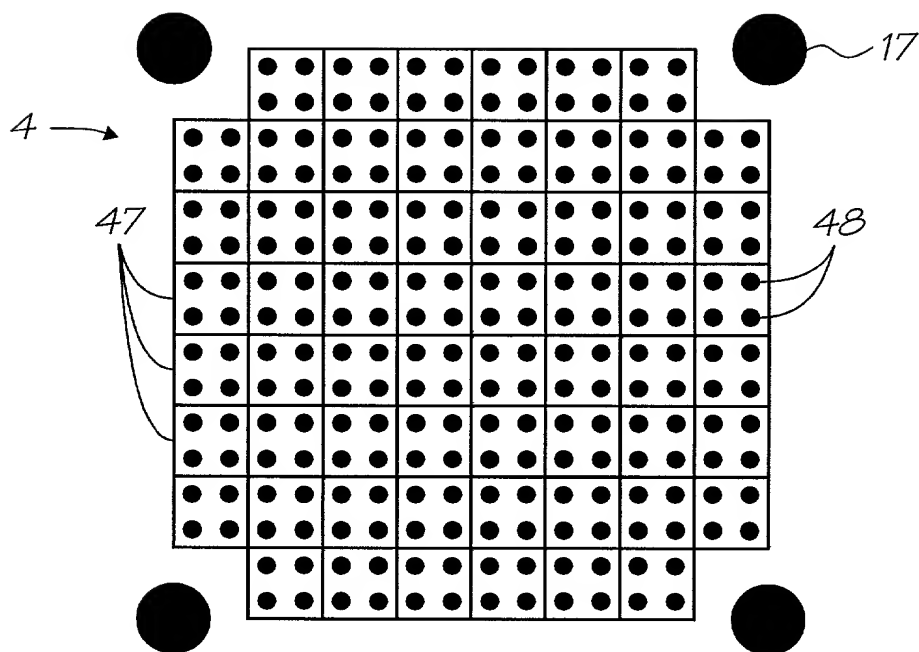


FIG. 5a

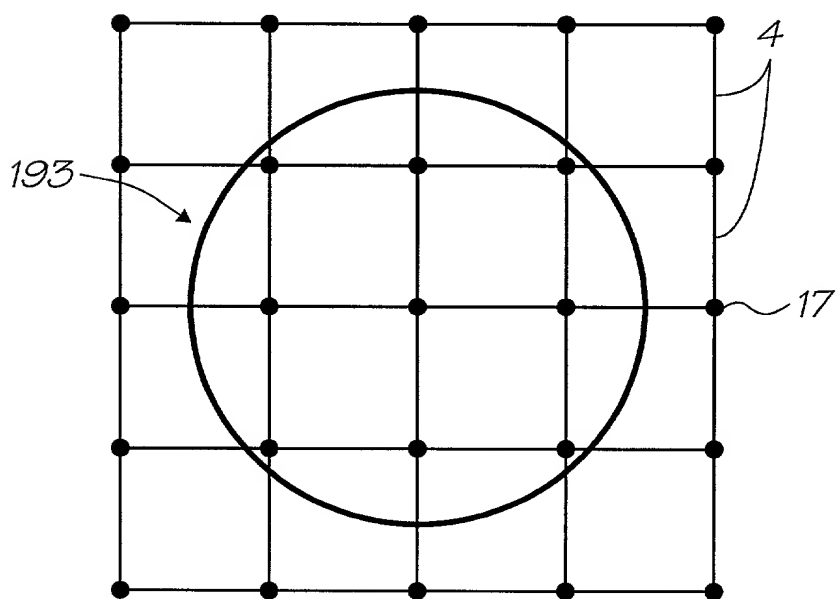


FIG. 5b

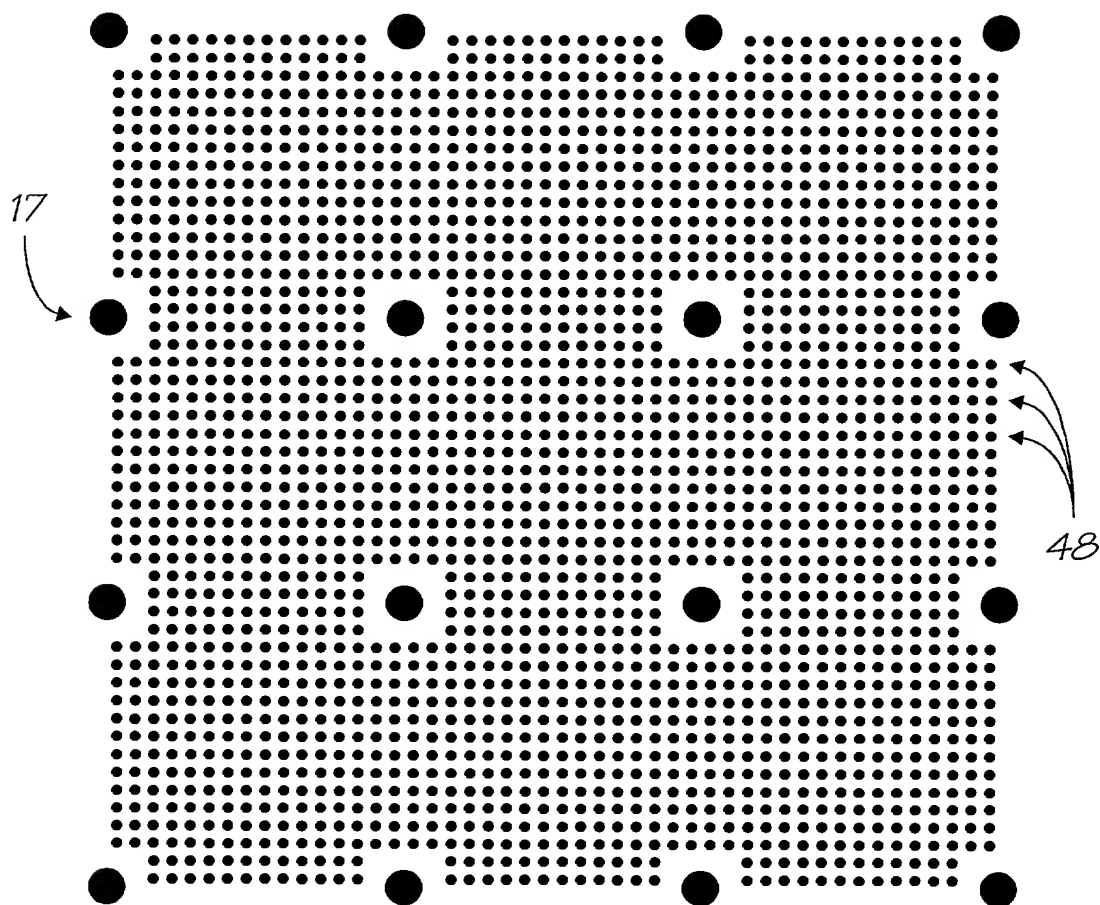


FIG. 5c

47

	1A	4G	1B	4F	1C	4O	
3O	2L	N2	2H	M2	2D	2E	2A
4C	1D	4F	1E	4J	1F	4N	1G
3K	2M	2J	2I	2E	2H	2B	
4B	1H	4E	1I	4J	1J	4M	1K
3G	2N	3F	2J	3E	2F	3D	2C
4A	1L	4D	1M	4H	1N	4L	1O
	2O	3C	2K	3B	2G	3A	

FIG. 5d

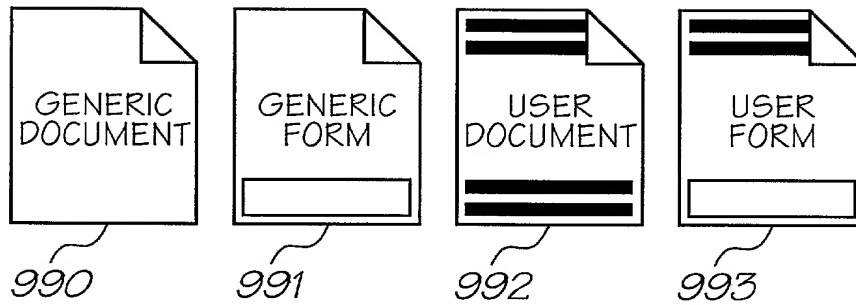


FIG. 6

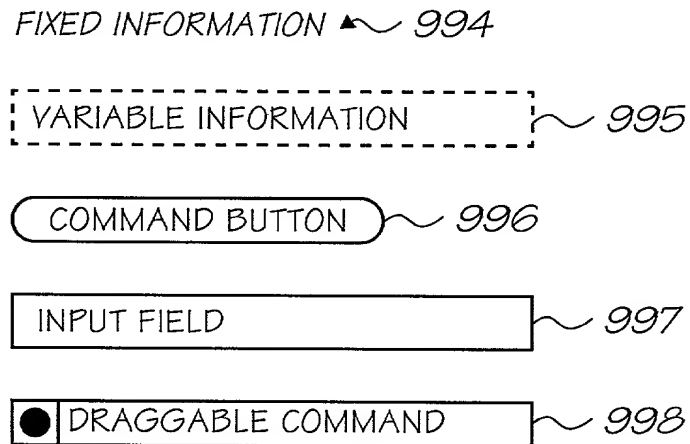


FIG. 7

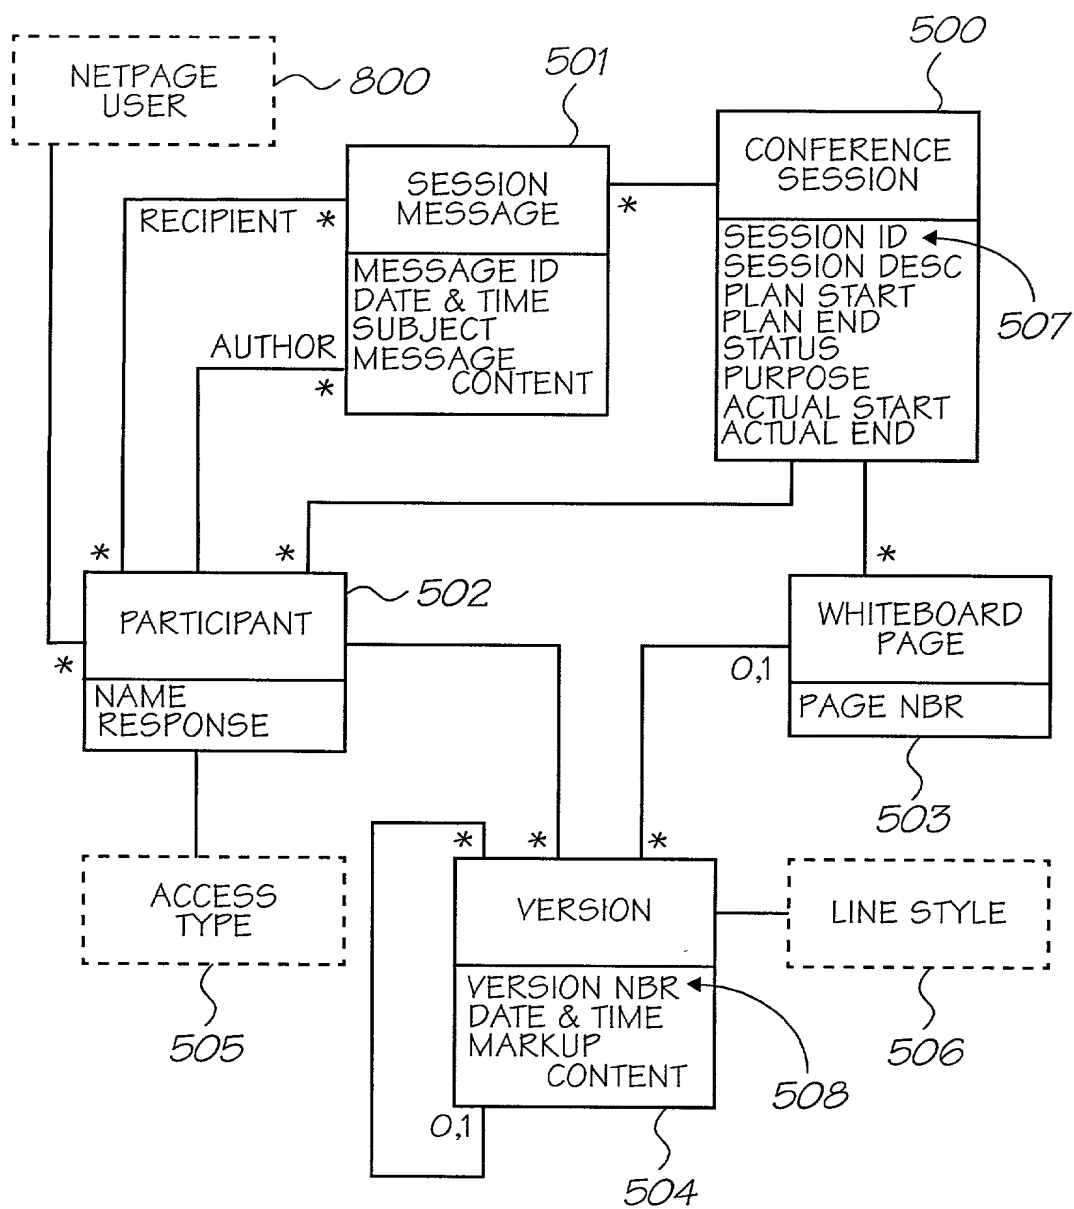


FIG. 8

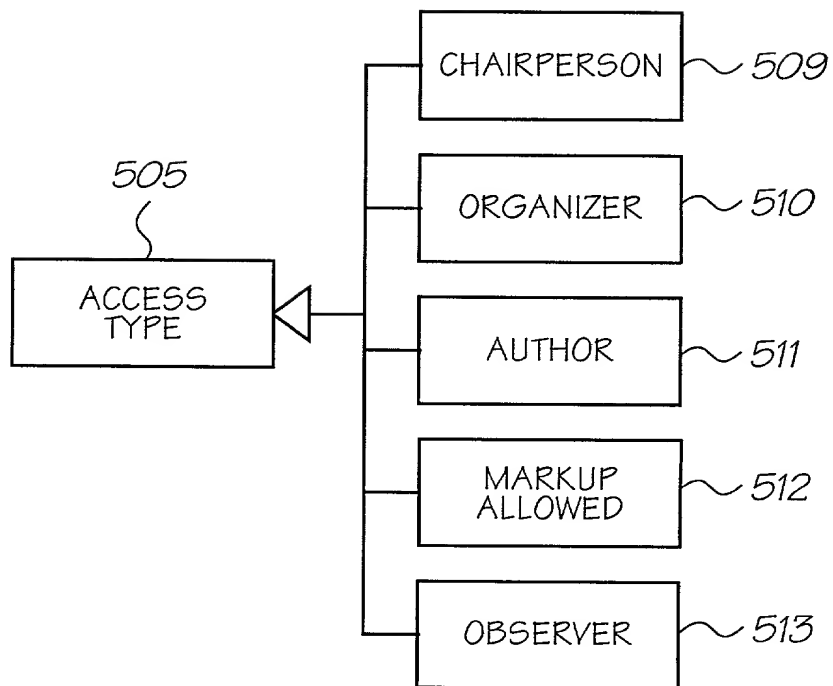


FIG. 9

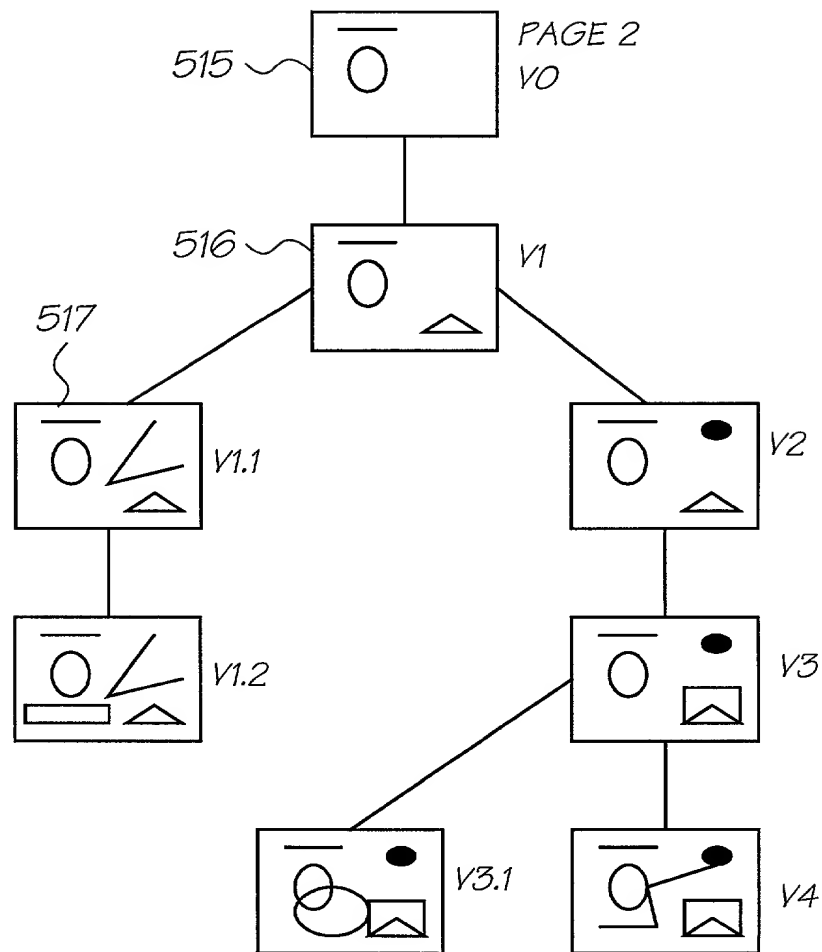


FIG. 10

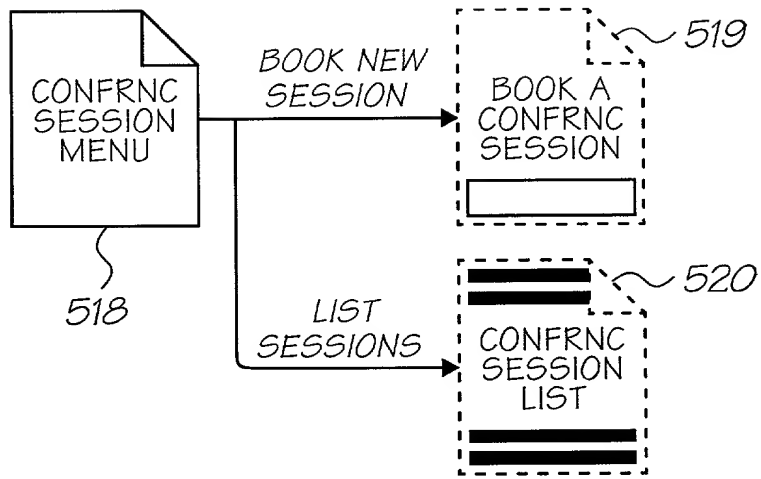


FIG. 11

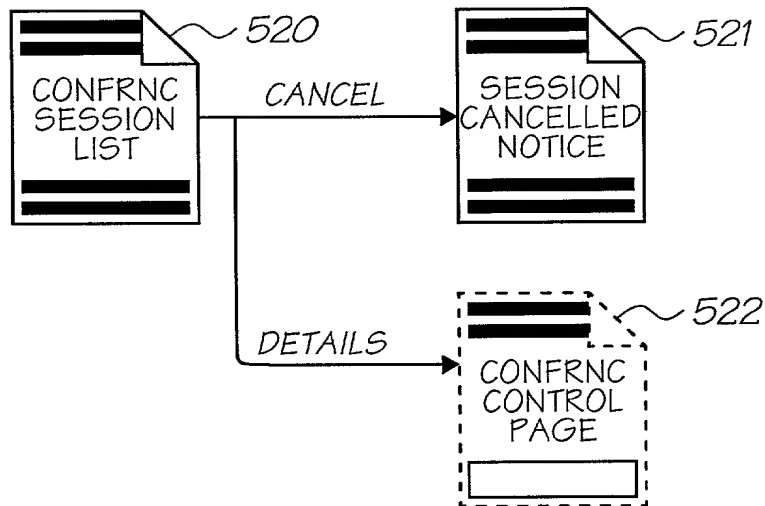


FIG. 12

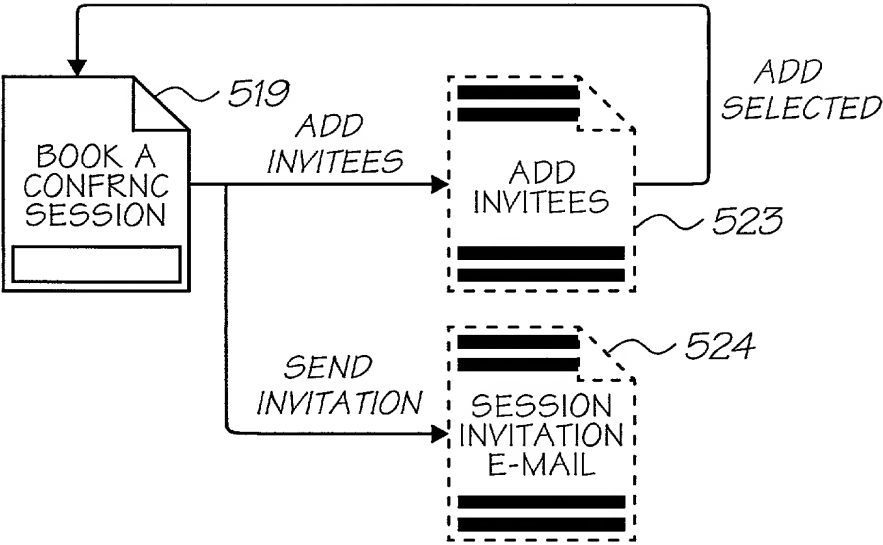


FIG. 13

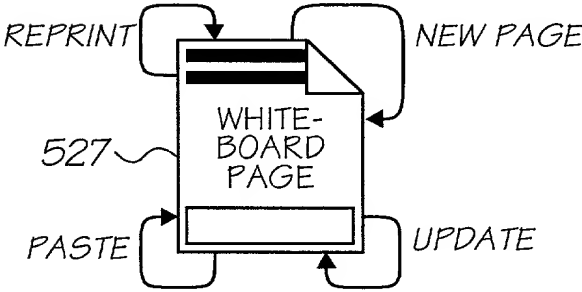


FIG. 14

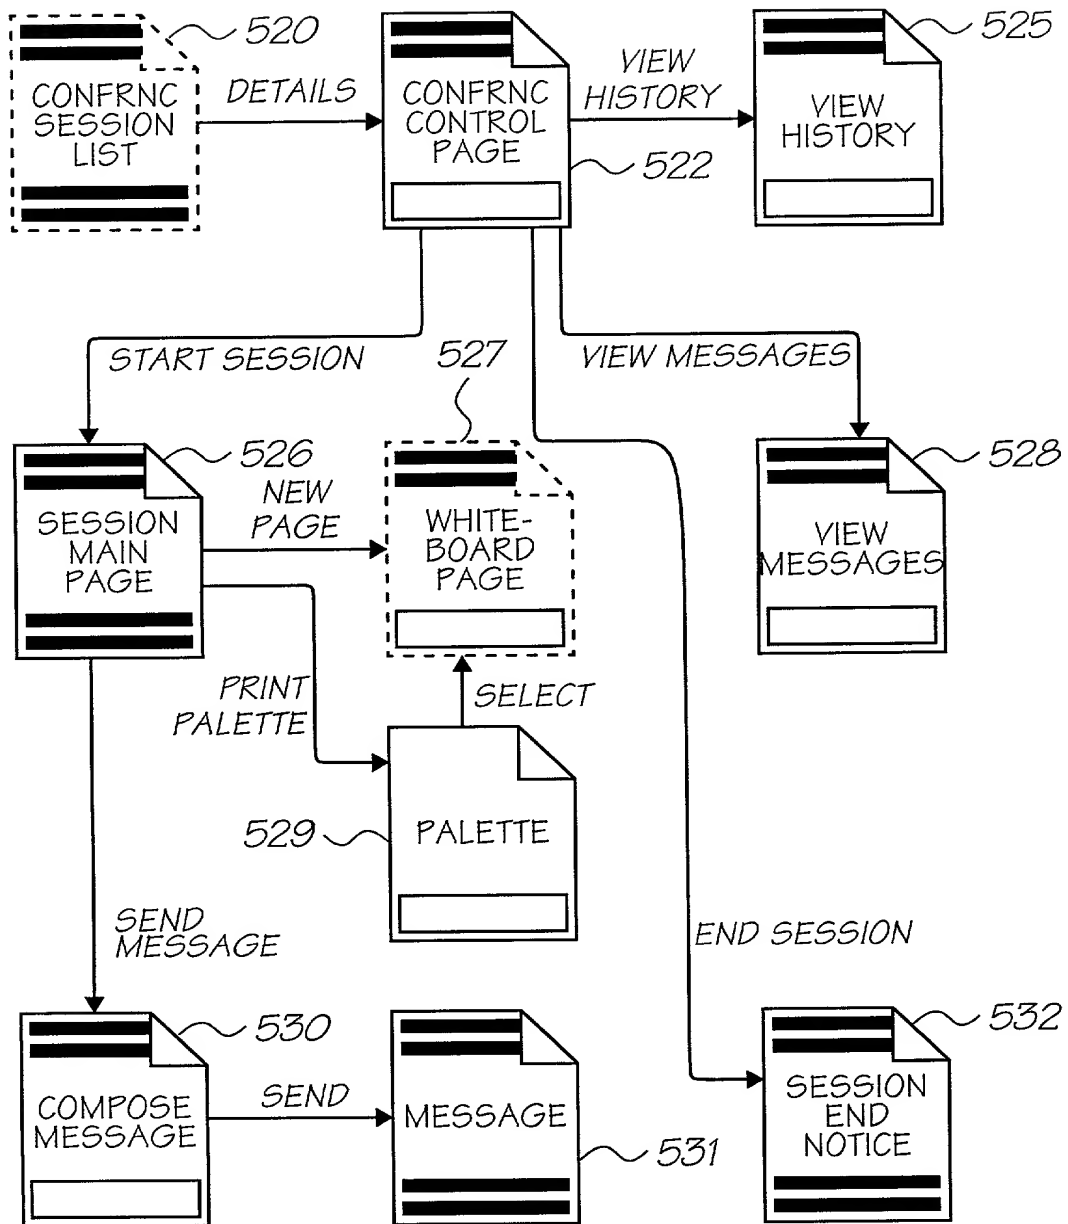


FIG. 15

BOOK A CONFERENCE SESSION

DATE TIME

TO BOOK A NEW CONFERENCE SESSION, COMPLETE THESE DETAILS:

SESSION DESCRIPTION

SESSION DESC

SESSION DATE

START DATE

FROM

START TIME

TO

END TIME

INVITE:

ADD INVITEES

533

CHAIR PERSON

OBSERVE ONLY

INVITEE

INVITEE

INVITEE

CONFERENCE SESSION PURPOSE

SESSION PURPOSE

SESSION PURPOSE

SESSION PURPOSE

519

534

SEND INVITATION

FIG. 16

CONFERENCE SESSION CONTROL PAGE [DATE TIME]

SESSION DESCRIPTION [SESSION DESC]

SESSION DATE [START DATE]
 FROM [START TIME] TO [END TIME]

CHAIRPERSON [NAME]

PARTICIPANTS	LEVEL
[NAME]	[ACCESS]
[NAME]	[ACCESS]
⋮	
[NAME]	[ACCESS]

MARKUP SESSION PURPOSE

[SESSION PURPOSE]

[SESSION PURPOSE]

[SESSION PURPOSE]

522

SESSION ACTIONS

START SESSION 535

END SESSION 536

VIEW HISTORY 537

VIEW MESSAGES

FIG. 17

SESSION MAIN PAGE
DATE TIME

SESSION DESCRIPTION
SESSION DESC

SESSION STARTED AT
START DATE
START TIME

SCHEDULED END
END TIME

PARTICIPANTS

NAME

NAME

}

NAME

NAME

LEVEL

ACCESS

ACCESS

ACCESS

ACCESS

MARKUP SESSION PURPOSE

SESSION PURPOSE

SESSION PURPOSE

SESSION PURPOSE

526

NEW PAGE

539

PRINT A BLANK WHITEBOARD PAGE

PRINT PALETTE

PRINT THE PALETTE OF AVAILABLE
LINE STYLES AND COLORS

SEND MESSAGE

SEND A MESSAGE TO A PARTICIPANT

FIG. 18

SESSION DESC

PAGE

PAGE

V. VERS

MARKUP BY

NAME

DATE TIME

WHITEBOARD PAGE

REPRINT

☒ PASTE

UPDATE

NEW PAGE

527

FIG. 19

CONFERENCE SESSION END NOTICE [DATE TIME]

SESSION DESCRIPTION [SESSION DESC]

SESSION STARTED AT [START DATE][START TIME]

SESSION ENDED AT [END TIME]

CHAIRPERSON [USER NAME]

PARTICIPANTS	LEVEL
[NAME]	[ACCESS]
[NAME]	[ACCESS]
⋮	
[NAME]	[ACCESS]

MARKUP SESSION PURPOSE

[SESSION PURPOSE]

[SESSION PURPOSE]

[SESSION PURPOSE]

532

FIG. 20

COMPOSE MESSAGE

DATE TIME

MESSAGE TO

☐ ALL PARTICIPANTS

☐ NAME

ACCESS

☐ NAME

ACCESS

☐ NAME

ACCESS

SUBJECT: SUBJECT

MESSAGE:

MESSAGE

530

SEND

FIG. 21

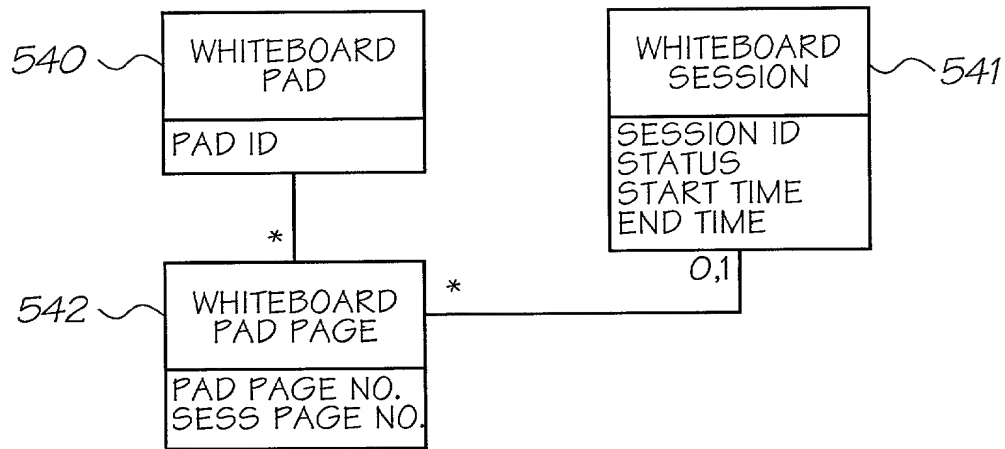


FIG. 22

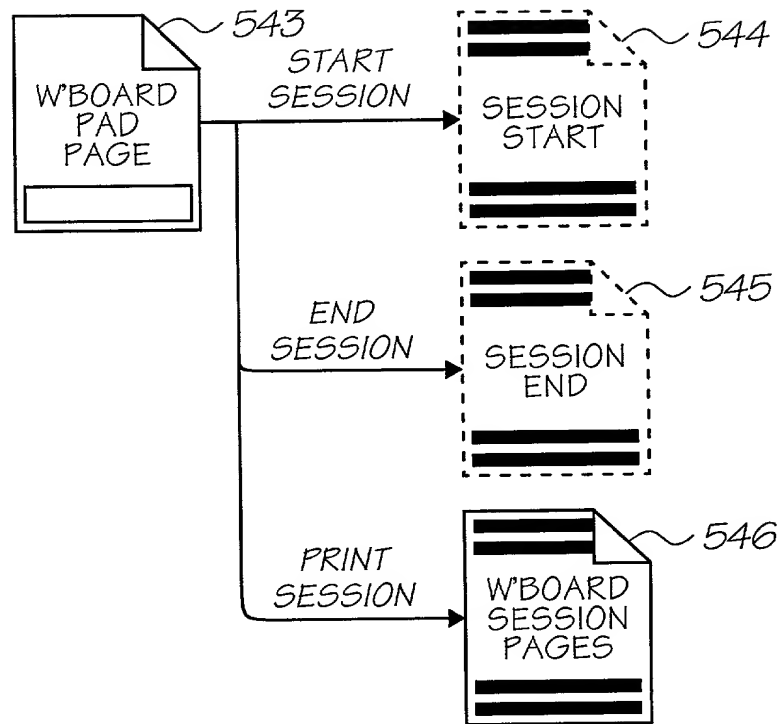


FIG. 23

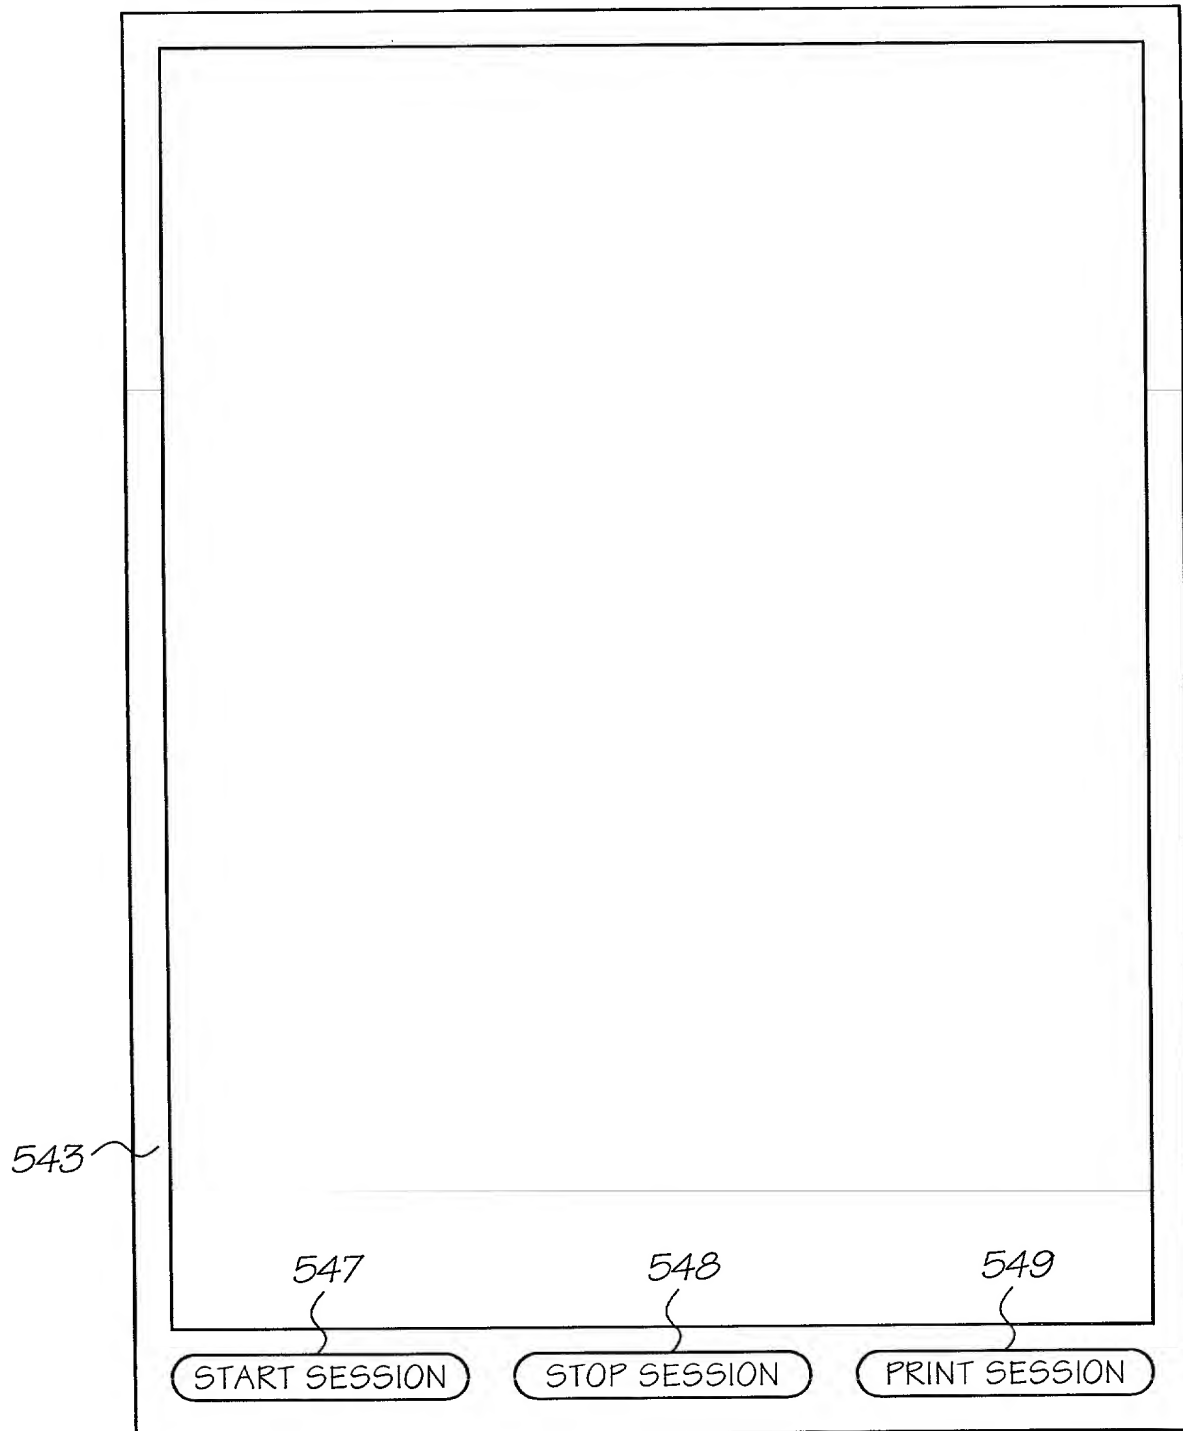


FIG. 24

FROM DATE/TIME TO DATE/TIME	PAGE # OF #

546 ~

FIG. 25

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)
Approved for use through 9/30/00 OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number



DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63) <input checked="" type="checkbox"/> Declaration Submitted with Initial Filing OR <input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)	Attorney Docket Number	NPA061US
	First Named Inventor	KIA SILVERBROOK
	COMPLETE IF KNOWN	
	Application Number	/
	Filing Date	
	Group Art Unit	
	Examiner Name	

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

METHOD AND SYSTEM FOR CAPTURING A NOTE TAKING SESSION

the specification of which (Title of the Invention)
☒ is attached hereto
OR
☐ was filed on (MM/DD/YYYY) as United States Application Number or PCT International Application Number and was amended on (MM/DD/YYYY) (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
PQ5829	Australia	02-24-2000	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231



Please type a plus sign (+) inside this box → ☐PTO/SB/01 (12-97)
Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

☐ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer
Number Bar Code
Label here


Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.

Direct all correspondence to: ☒ Customer Number or Bar Code Label **24011** OR ☒ Correspondence address below

Name	Kia Silverbrook				
Address	Silverbrook Research Pty Ltd				
Address	393 Darling Street				
City	Balmain	State	NSW	ZIP	2041
Country	Australia	Telephone	61-2-9818-6633	Fax	61-2-9818-6711

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle if any)		Family Name or Surname	
KIA		SILVERBROOK	
Inventor's Signature		Date	Nov. 22, 2000
Residence: City	Balmain	State	NSW
		Country	Australia
		Citizenship	Australian
Post Office Address	393 Darling Street		
Post Office Address			
City	Balmain	State	NSW
		ZIP	2041
		Country	Australia

☒ Additional inventors are being named on the 1 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Please type a plus sign (+) inside this box → +Approved for use through 9/30/98. OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

DECLARATION**ADDITIONAL INVENTOR(S)**
Supplemental Sheet
Page 1 of 1**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

PAUL**LAPSTUN**Inventor's
Signature*Paul Lapstun*

Date

**Nov. 22,
2000**

Residence: City

Rodd Point

State

NSW

Country

Australia

Citizenship

Norwegian

Post Office Address

13 Duke Avenue

Post Office Address

City

Rodd Point

State

NSW

ZIP

2046

Country

Australia**Name of Additional Joint Inventor, if any:**☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Name of Additional Joint Inventor, if any:☐ A petition has been filed for this unsigned inventor

Given Name (first and middle [if any])

Family Name or Surname

Inventor's
Signature

Date

Residence: City

State

Country

Citizenship

Post Office Address

Post Office Address

City

State

ZIP

Country

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.